


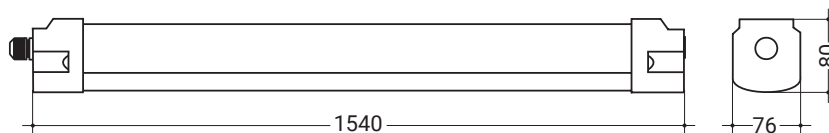


FRP2075.1XX22 - 60° / 90° - ON/OFF
FRP2071.1AX22 - Opal - ON/OFF
FRP2110.1XX22 - 60° / 90° - ON/OFF
FRP2075.2XX22 - 60° / 90° - DALI
FRP2071.2AX22 - Opal - DALI
FRP2075.8XX22 - 60°/90° - EMC
FRP2071.8AX22 - Opal - EMC

220-240V 50/60Hz

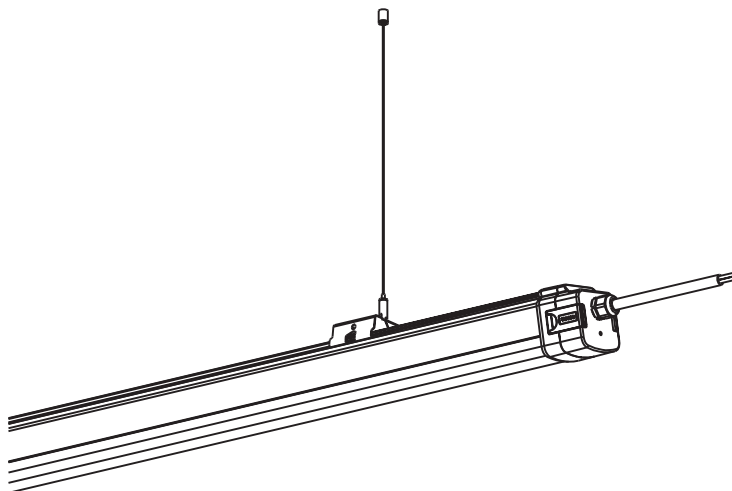

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

To avoid electric shock:

- Be certain electrical power is OFF before and during installation and maintenance.
- Luminaire must be connected to a wiring system with an equipment-grounding conductor.
- Make sure the supply voltage is the same as the rated luminaire voltage.
- Do not operate in ambient temperatures above those indicated on the luminaire nameplate.

To avoid Fire:

- Keep flammable and combustible materials away from the light source and/or lens.
- Ensure lamps are installed correctly.
- Use correctly rated supply conductors as indicated by product labeling.


Burn:

- Allow luminaire and lamps to cool before handling luminaire or changing lamp.
- Follow all warnings, restrictions and recommendations given by the lamp manufacturers.

Personal Injury:

- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.
- Always support the weight of the luminaire.


INFORMATION ZUR EU ÖKODESIGN VERORDNUNG




Wichtige Informationen zur Energieeffizienz von UEBEX Leuchten, sowie zur EU Ökodesignverordnung finden Sie unter: www.uebex.com

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C.
This product contains a light source of energy efficiency class C.

Accessories

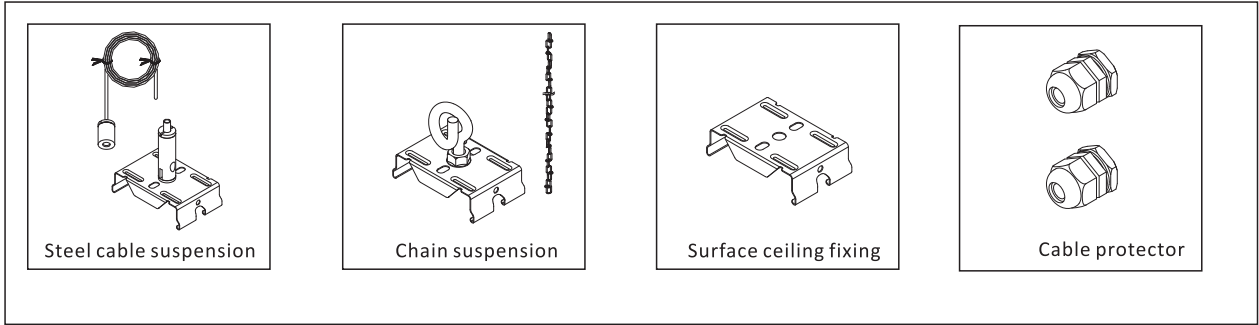


Product Size

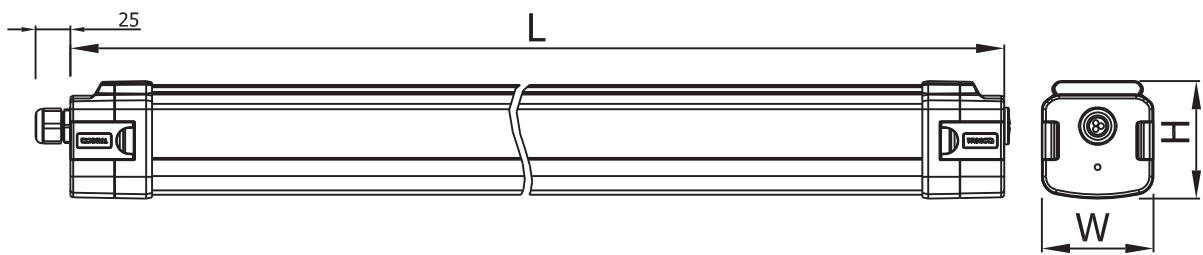


L	W	H
1540mm	76mm	80mm

Tools

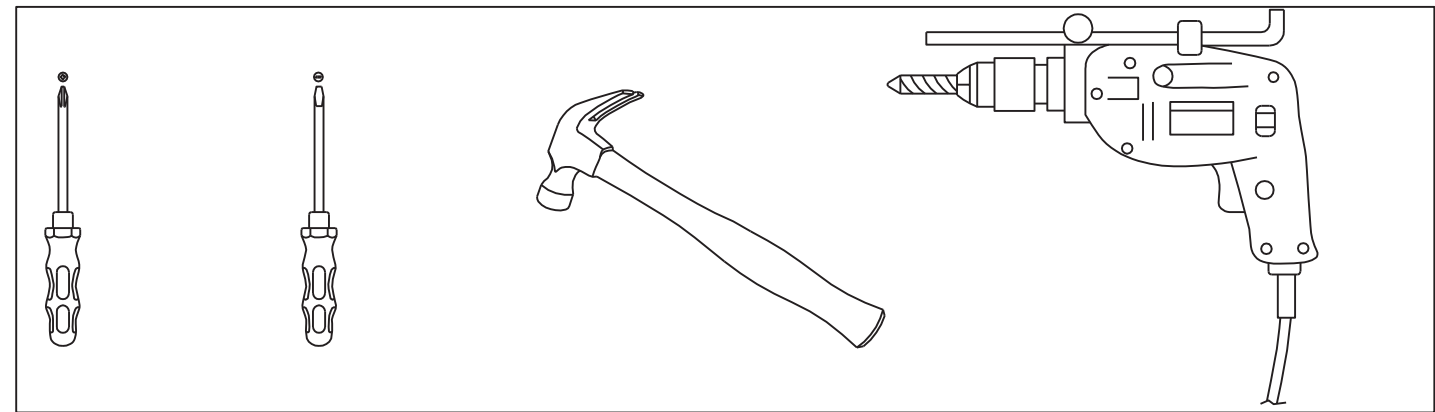


SUSPENDING MOUNTING




Drill a hole on ceiling.

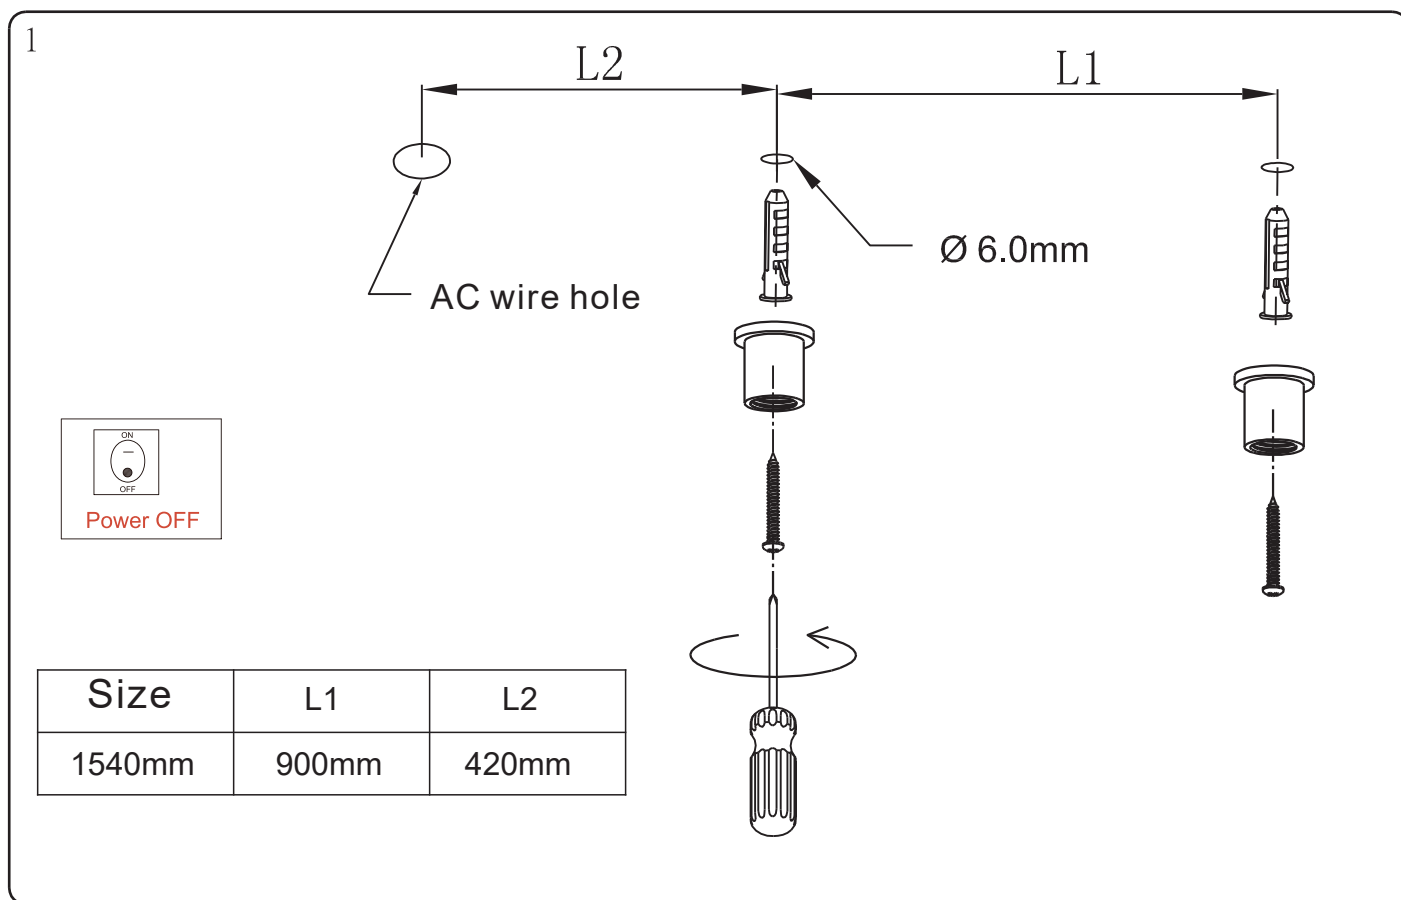


Screw the steel cable onto the ceiling.

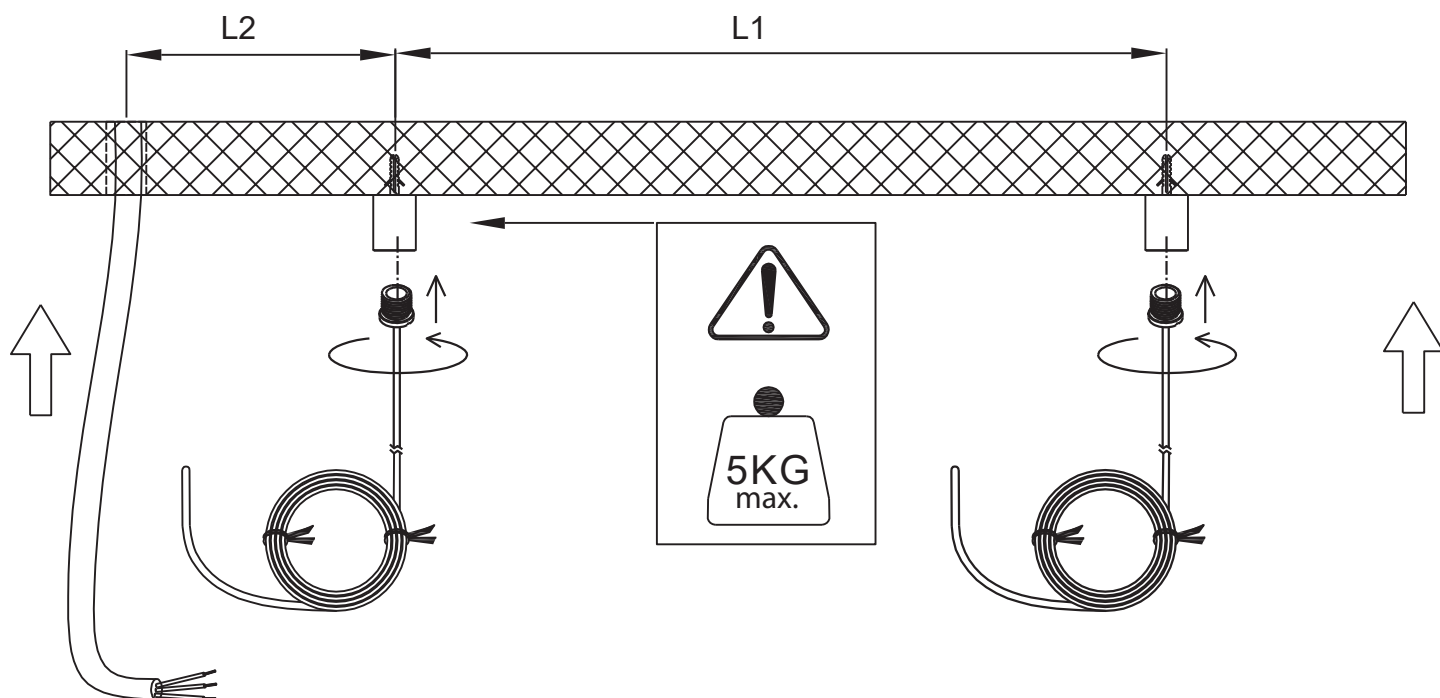

Make sure the fixture is in the right place

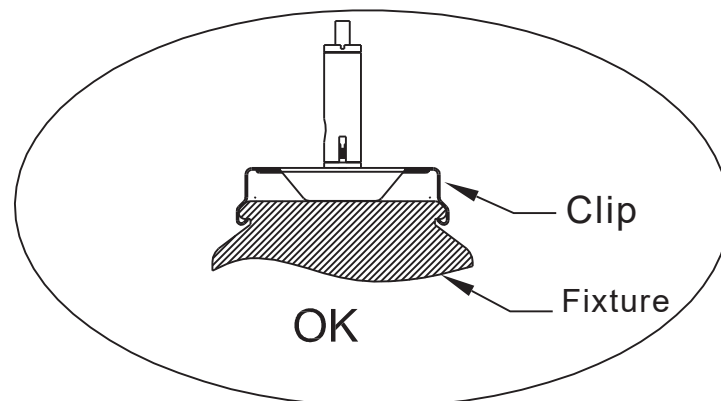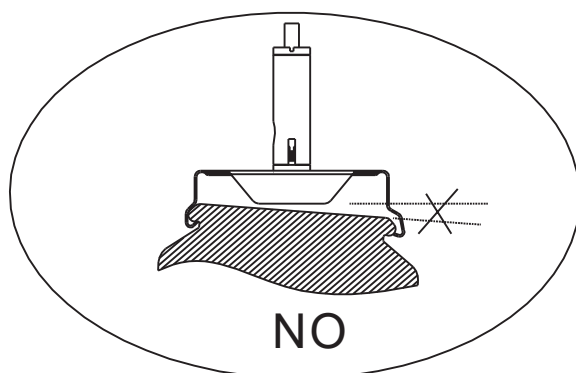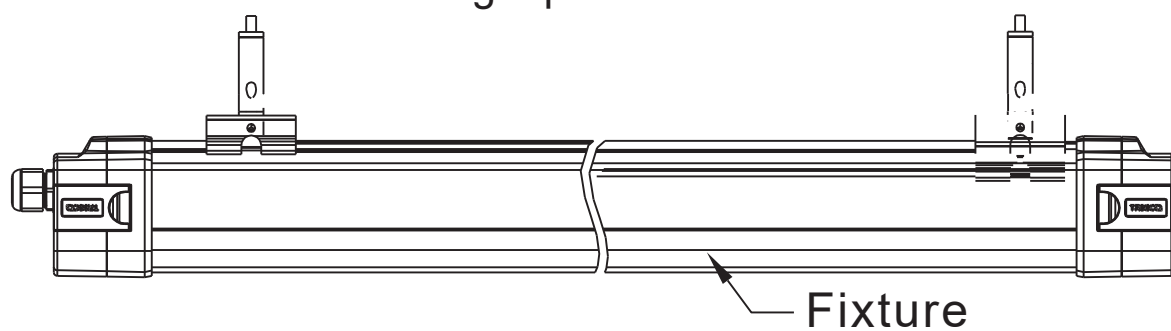

Pass steel cable through and adjust the fixture suspension height as will.

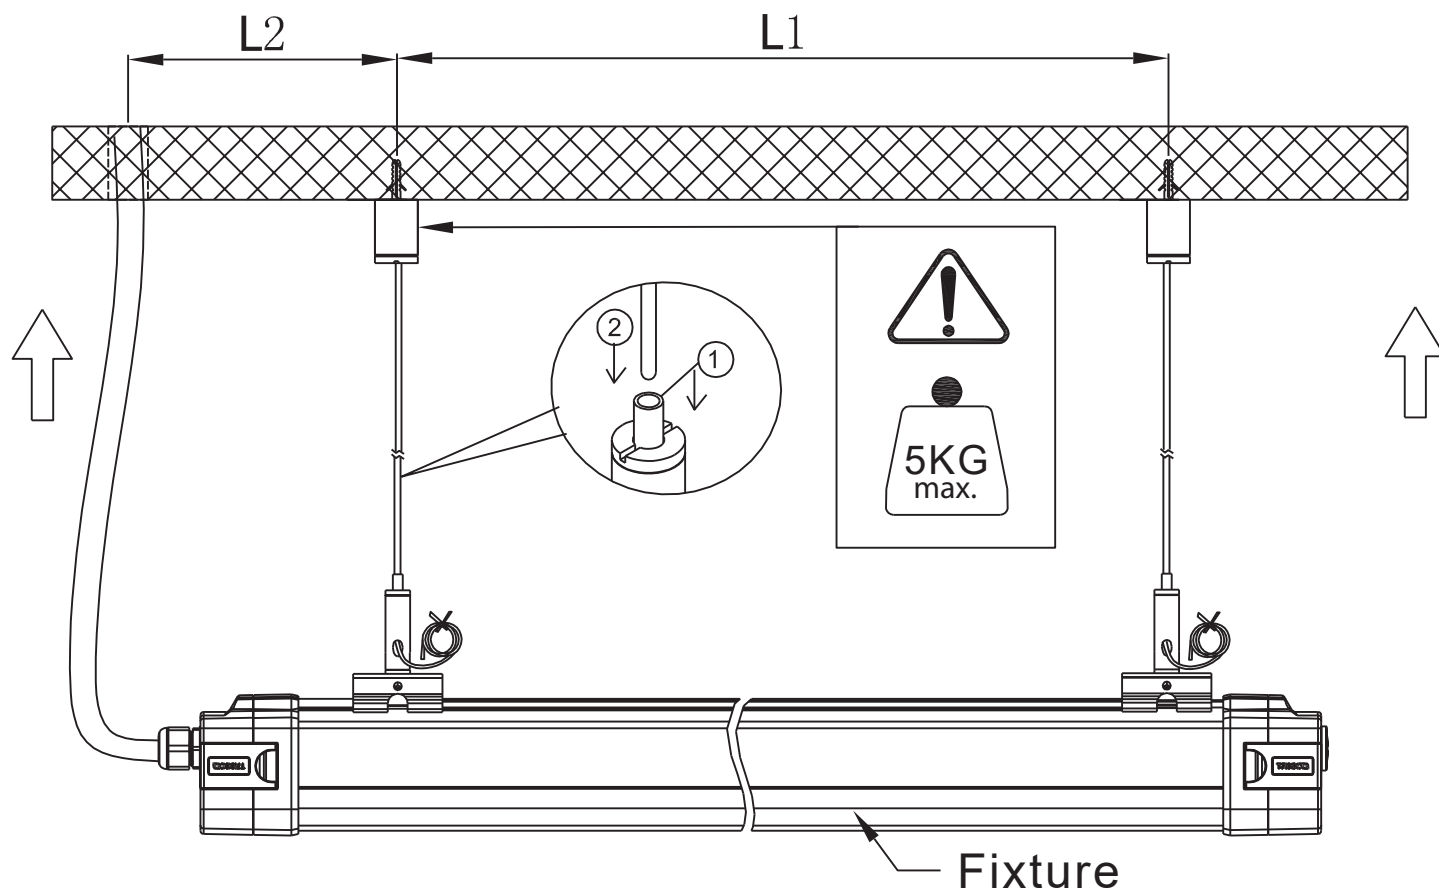

SURFACE MOUNTING

Drill a hole in the ceiling

1

L2

AC wire hole

L1

Ø 6.0mm

22

ON

OFF

Power OFF

Size	L1	L2
1540mm	900mm	420mm

!

5KG max.

22

Install the fixture into the clips

L2

L1

22

Clip

Fixture

Make sure the fixture is in the right place.

Install NG


Clip

Fixture

Install OK


Single fixture installation diagram.

Attention: Always turn off during installation.

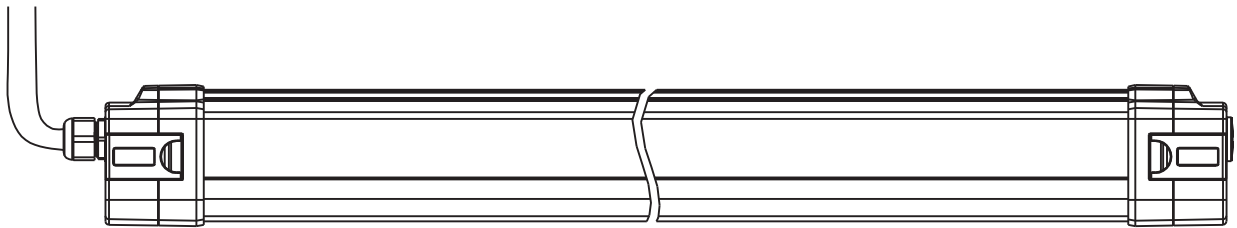


1

Clip End cap

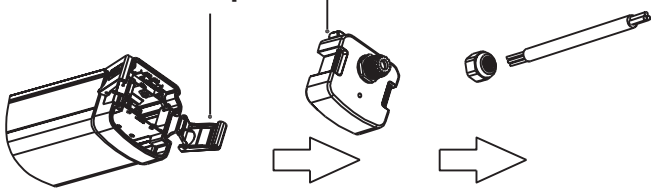

Remove the endcap , pass the wire through water proof connector.


2

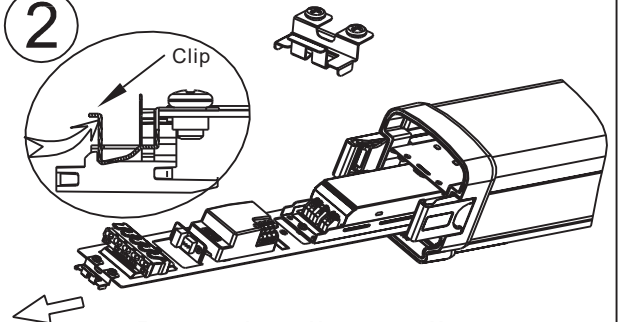


Press the clip to pull out driver fore wiring.

3


Take the diagram on right side for wiring reference.

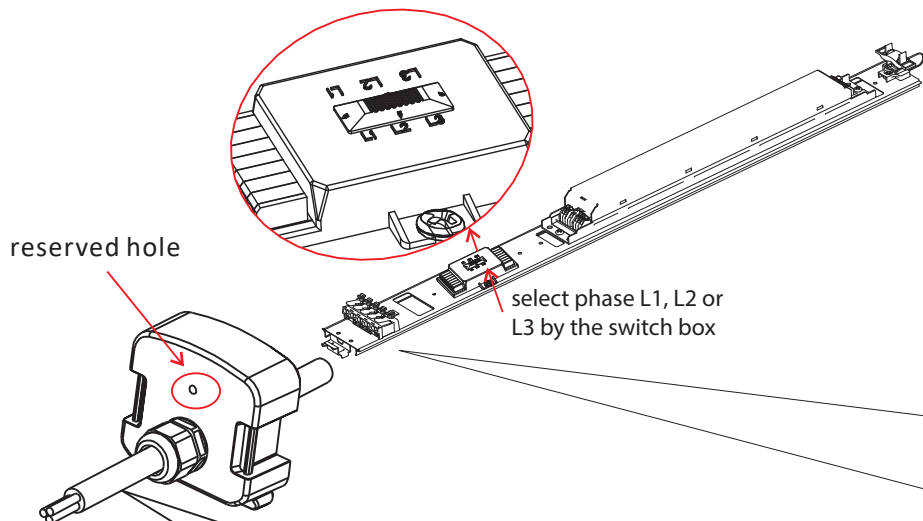

A.Standard function L1 L2 L3 ⊕ N

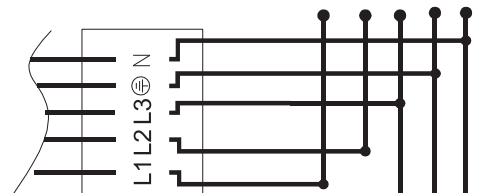


B.Emergency function L1 L2 Permanent Power ⊕ N

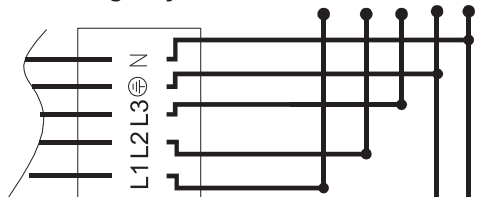


L3 is deactivated and is to be used for permanent power supply; in the event of a power failure, the system automatically switches to emergency operation.

C.Dimming function Dim- Dim+ L1 L2 L3 ⊕ N

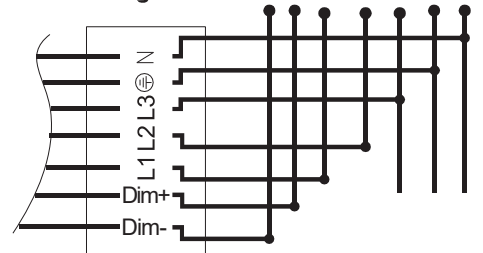

2).Specifctaion of the Connected Cable

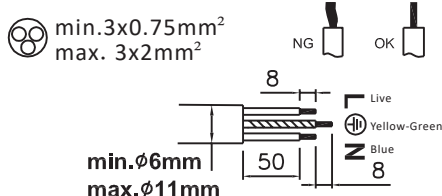

- ④ Confirm the wiring, fix endcap with clip, tighten waterproof connector, then switch on.

Continuous installation diagram.

Attention: Always turn power off during installation

