

# 01 Hallenleuchten HB2



**LUMINAIRE**  
suspended, surface mounted  
aluminium, steel  
powder-coated grey  
IP65, IK08

**LED**  
4000K  
CRI>80  
4-Step MacAdam  
ON-OFF + DALI


**LED LIFETIME (est.)**  
70.000h L80

**OPTICS**  
beam angle 60° / 80°

**OPTIONS**  
mounting accessories

**DE** High Performance Hallenleuchte mit erhöhter Effizienz und perfektionierter Lichtverteilung. Präzise Lichtlenkung und hohe Entblendung durch spezielle Mehrfachkammer-Reflektoreinheit MKR. Robustes, rotationssymmetrisches Gehäuse, pulverbeschichtet mit hoher Funktionalität. Innovatives Design mit optimiertem passivem Thermomanagement und intelligenter Luftzirkulation. Minimale Staubablagerung und enorm hohe Lebensdauer. Große Flexibilität bei der Montage bietet das umfangreiche Zubehör.

**EN** High Performance high bay luminaire with increased efficiency and perfected Light distribution. Precise light control and high glare reduction due to special Multiple chamber reflector unit MKR. Robust, rotationally symmetrical housing, powder-coated with high functionality. Innovative design with optimized passive Thermal management and intelligent Air circulation. Minimal dust deposit and enormously long service life. Great flexibility in installation offers the extensive accessories.

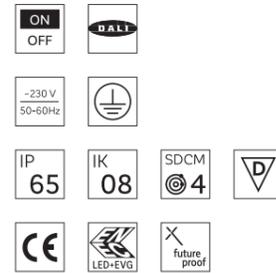


# High-bay luminaires 01 HB2




ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
HLH2130.2X424	130W	18.500lm	4000K	5kg
HLH2200.2X424	200W	28.500lm		

2 X 2  
2 optics  
2 SPOT 60°  
3 MEDIUM 80°

Lichtkurven | Lightcurves

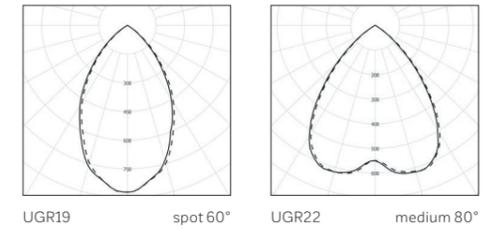

Technische Skizzen | Technical sketches



Installation | Installation



**Leuchte geeignet für erhöhte Umgebungstemperatur**  
**Luminaire suitable for increased ambient temperature**




intelligent thermal management



easy one-point mounting



innovative lens system for maximum light output

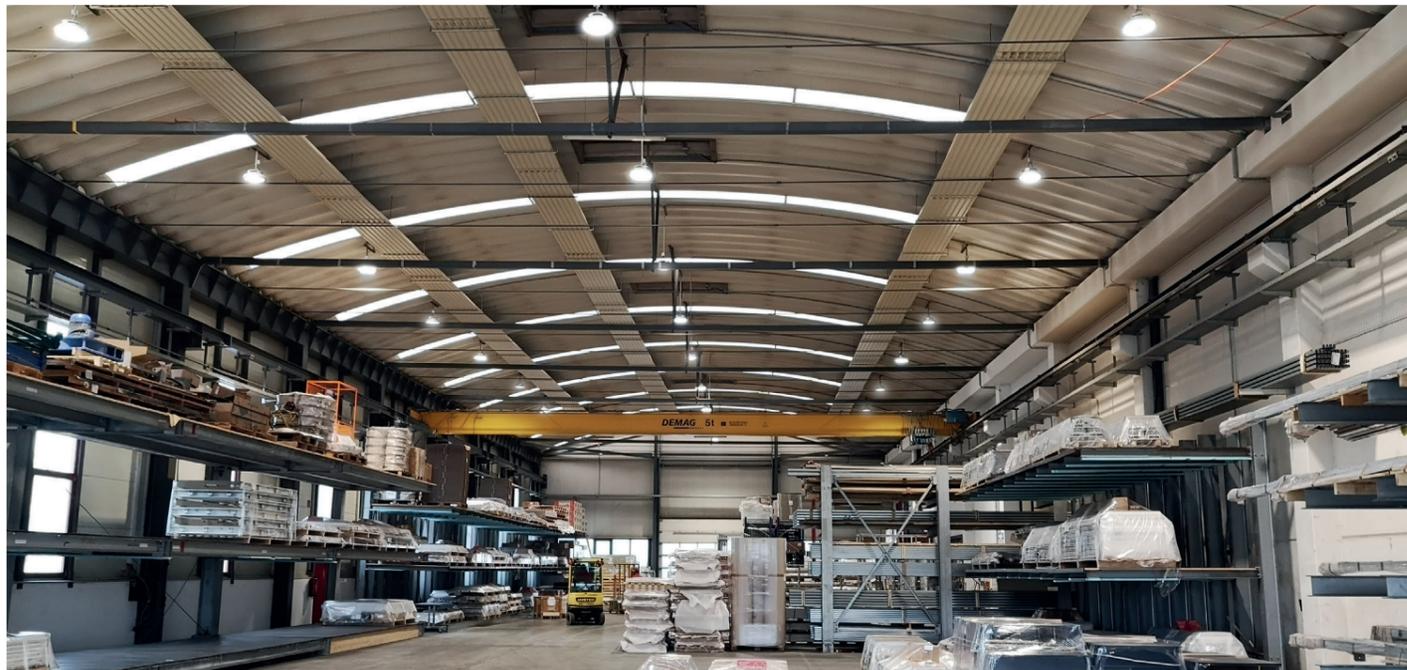

Leuchte mit begrenzter Oberflächentemperatur, geeignet bei besonderem Brandschutzrisiko

Luminaire with limited surface temperature, suitable for special fire protection risk

ORDER CODE	BESCHREIBUNG   DESCRIPTION	Zubehör   Accessories
HLH2ZB010	Anbau-Montagebügel schwenkbar - HB2   surface mounting bracket swiveling - HB2	
HLH2ZB020	2m Kette für Pendelmontage inkl. Karabiner   2m chain for pendant mounting incl. carabiner	