

13 Technische Mastaufsatzleuchten MID1



DE Straßenleuchte mit geradlinig moderner Formensprache. Vielseitige Lösung für die professionelle Beleuchtung von Verkehrswegen aller Art. Gehäuse aus grau pulverbeschichtetem Aluminiumdruckguss. Hocheffiziente LED-Technik mit innovativem Linsensystem für eine optimale Lichtstärkeverteilung. Am EVG einstellbarer bzw. programmierbarer Lichtstrom. Abdeckung aus supertransparentem gehärtetem Glas. Extrem witterungsbeständig und langlebig. Einfache und schnelle Montage durch Edelstahlklemmschrauben. Zusätzliche Adapter zur Montage auf Anfrage erhältlich.

EN Street light with straight and modern design. Multifunctional solution for the professional lighting of all kinds of traffic routes. The housing is made of grey powder-coated die-cast aluminium. Highly efficient LED technology with innovative lens system for optimal luminous intensity distribution. Luminous flux adjustable and/or programmable at the control gear. Super-transparent tempered glass cover. Extremely weather-proof and durable. Simple and quick installation with stainless steel clamping screws. Additional adapters for mounting available on request.


LUMINAIRE
streetlight
aluminium, tempered glass
powder-coated RAL 9007
IP66, IK08

LED
2200K, 2700K, 3000K, 4000K
CRI>70
4-Step MacAdam
ON-OFF, DIM STREET

LED LIFETIME (est.)
100.000h L80

OPTICS
street ME, street DWC, wide SCL,
SIDEWALK left / right

OPTIONS
individually adjustable dimming



Technical pole-top luminaires 13 MID1



MID1-S

ORDER CODE	SYSTEM POWER	LED LUMINOUS EFFICIENCY	TYPICAL MOUNTING HEIGHT	WEIGHT
STM1008.XXX14	10-20W	up to 168lm/W	4-6m	6,1kg
STM1016.XXX14	15-38W			

MID1-M

STM1032.XXX14	36-74W	up to 168lm/W	6-8m	7,5kg
STM1048.XXX14	54-112W		8-10m	

MID1-L


STM1064.XXX14	60-150W	up to 168lm/W	8-12m	10,5kg
---------------	---------	---------------	-------	--------

1 control
1 ON/OFF
6 DIM STREET


2 optics
1 STREET ME
2 STREET DWC
3 WIDE SCL
4 SIDEWALK left
5 SIDEWALK right

3 colour temp.
1 2200K
2 2700K
3 3000K
4 4000K

Lichtkurven | Lightcurves

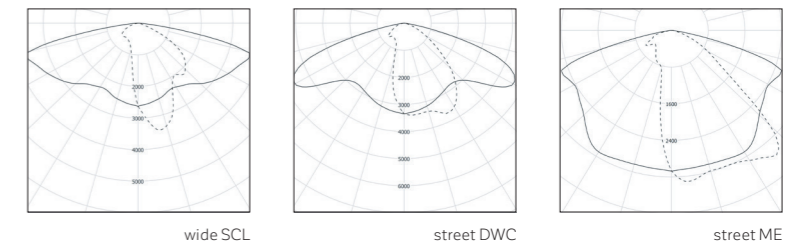

Technische Skizzen | Technical sketches

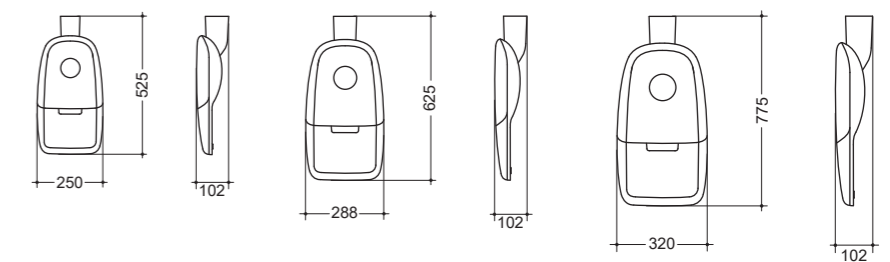

Maste und Zubehör erhalten Sie ebenfalls bei UEBEX.
Masts and accessories are also available at UEBEX.

Ein maßgeschneidertes autarkes Dimmprofil mit Zeitintervallen und Lichtstufen wird in den LED-Treiber programmiert. Es wird keine zusätzliche Verkabelung an der Leuchte benötigt.

A tailor-made self-sufficient dimming profile with time intervals and light levels is programmed into the LED-driver. No additional wiring is required on the luminaire.

