

# 15 Architektonische Strahler ZEUS


# Architectural spotlights 15 ZEUS



<b>LUMINAIRE</b>
architectural light aluminium powder-coated black IP65, IK08
<b>LED</b>
3000K CRI>80 4-Step MacAdam ON-OFF
<b>LED LIFETIME (est.)</b>
50.000h L80
<b>OPTICS</b>
direct, direct-indirect
<b>OPTIONS</b>
ZEUS ROOF for surface mounting

**DE** Architektonischer Strahler mit wahlweise ein- oder zweiseitigem Lichtaustritt. Flexibel einsetzbar an Wand und Fassade, sowie im Innen- als auch im Außenbereich. Durch unterschiedliche Bauform und Abstrahlcharakteristik bietet ZEUS für jede Anwendung den richtigen Effekt. Hochwertig gefertigtes Gehäuse aus schwarz pulverbeschichtetem Aluminium. Hocheffiziente LED-Technik, witterungsbeständig und langlebig.

**EN** Architectural spotlight with optional one- or two-sided light output for flexible use on walls and facades, both indoors and outdoors. Due to the different design and radiation characteristics the spotlight offers the perfect lighting effect for every application. High-quality manufactured housing made of anthracite-coloured powder-coated aluminium. Highly efficient LED technology, weatherproof and durable.



## ZEUS round

ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	LIGHT OUTPUT	DIMENSION
ASZR010.11323.E	10W	1050lm	single	131 x 166mm
ASZR020.11323.Z	20W	1700lm	double	131 x 188mm
ASZR020.11323.E	20W	2000lm	single	168 x 204mm
ASZR040.11323.Z	40W	3800lm	double	168 x 226mm


## ZEUS square

ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	LIGHT OUTPUT	DIMENSION
ASZS010.11323.E	10W	650lm	single	128 x 150mm
ASZS020.11323.Z	20W	1300lm	double	
ASZS022.11323.E	22W	1400lm	single	168 x 170mm
ASZS036.11323.Z	36W	2800lm	double	

## ZEUS roof

ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	LIGHT OUTPUT	DIMENSION
ASZRR12.11323	12W	1300lm	single	Ø 126 x 138mm

### Lichtkurven | Lightcurves

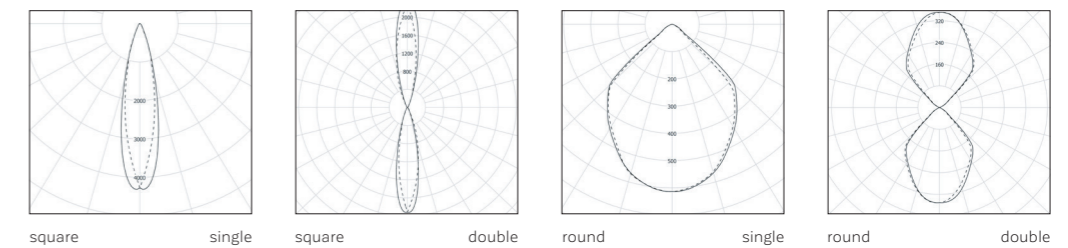

### Technische Skizzen | Technical sketches

