



## 02 Flutlichtstrahler SUPREA

## Floodlights 02 SUPREA

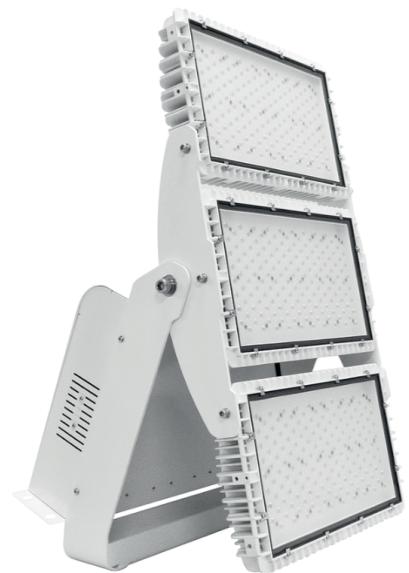

**DE** High-Performance LED-Flutlichtstrahler aus extrem robustem und widerstandsfähigem Aluminiumgehäuse für härteste Umgebungsbedingungen. 3G vibrationsresistent sowie salzverträglich und komplett marinefest. Montagebügel und Halterung aus Edelstahl. Abdeckung aus gehärtetem Sicherheitsglas. Rotationsverstellbarer Montagehalter und einzeln schwenkbare Lichteinheiten. Optimiertes Thermomanagement und intelligente Luftzirkulation. Hocheffiziente LED-Technik mit Einzellinsen-Optiksystem für eine gezielte Lichtstärkeverteilung. Betriebsgerät mit integrierter Temperatur-Überwachung. Einfaches Steuerungssystem auf Anfrage.

**EN** High-performance LED floodlight made of extremely robust and resistant aluminium-housing for toughest environmental conditions. 3G vibration resistant as well as salt tolerant and completely navy resistant. Mounting bracket and holder made of stainless steel. Cover made of hardened safety glass. Rotationally adjustable mounting bracket and individually pivoting light units. Optimised thermal management and intelligent air circulation. Highly efficient LED technology with single lens optical system for targeted light intensity distribution. Control gear with integrated temperature monitoring. Simple control system available.

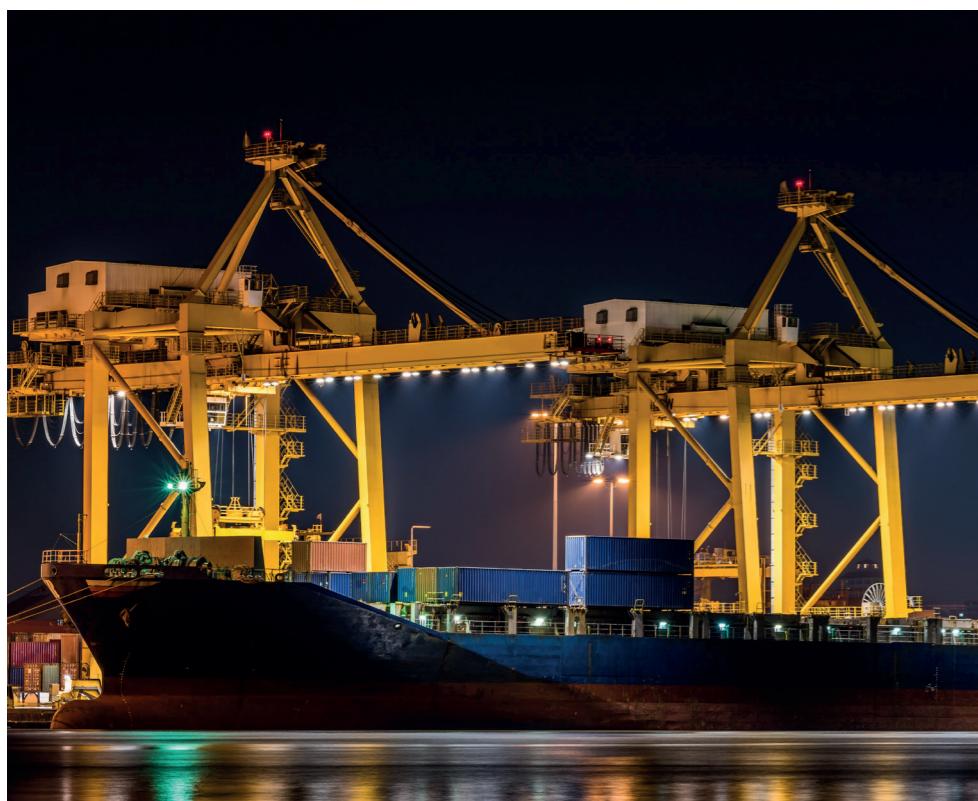

### LUMINAIRE

surface mounted  
aluminium, stainless steel  
powder-coated white  
IP66, IK10

### LED



1800K, 3000K, 4000K, 5000K  
CRI>80  
4-Step MacAdam  
ON-OFF + DIM 1-10V, WIRELESS

### LED LIFETIME (est.)

80.000h L80

### OPTICS

beam angle 12° / 15° / 30° / 60° / 80° / asym.





Vielseitige Steuerungsmöglichkeiten über App, Fernbedienung oder Touchpanel.  
Versatile control options via App, remote control or touchpanel.

400 V Auf Anfrage auch mit 400V Eingangsspannung.  
On request also with 400V input voltage.



ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	OPTICS	COLOUR TEMP.	WEIGHT
FLSU0350.3XX22	350W	49.000lm	symmetric	1800K	9kg
FLSU0700.3XX22	700W	98.000lm		3000K	22kg
FLSU1050.3XX22	1050W	147.000lm		4000K	28kg
FLSA0240.3VX22	240W	33.600lm		5000K	8,5kg
FLSA0450.3VX22	450W	63.000lm	asymmetric		12kg

X X  
2 3  
2 optics  
0 12° 2 1800K  
1 15° 3 3000K  
2 30° 4 4000K  
3 60° 5 5000K  
4 80°

Lichtkurven | Lightcurves

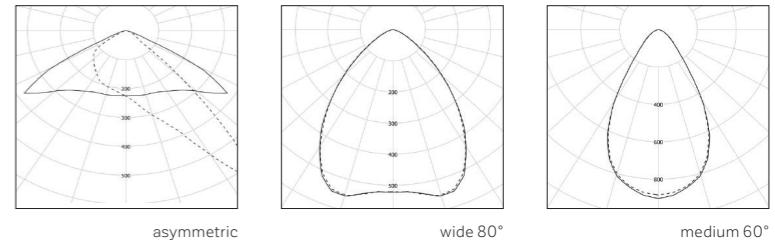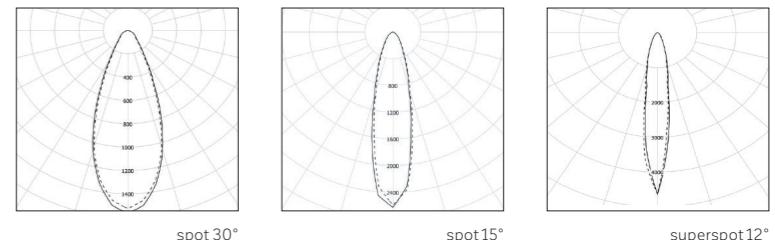

Technische Skizzen | Technical sketches

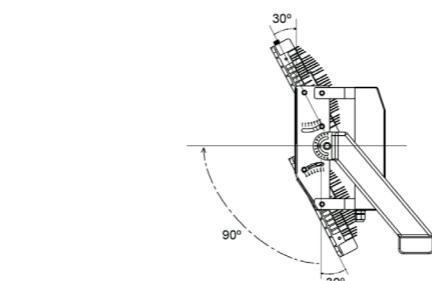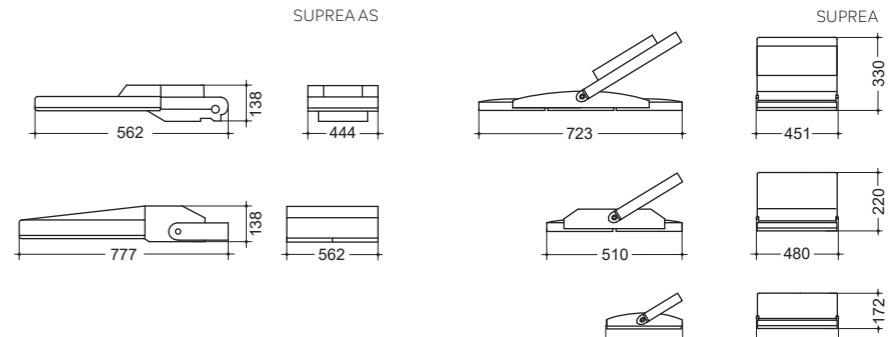

Zubehör | Accessories