

MID2

Quickinfo

LUMINAIRE

street, path, parking space
for mast top Ø60mm or
Ø48/Ø76mm with optional adapter
aluminium, grey RAL9022
IP66, IK09

LED


2200K, 2700K, 3000K, 4000K
CRI>70, CRI>80 optional
initial MacAdam 4 SDCM
100.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable
DALI dim
automatic DIM profile



Description

The MID2 street luminaire impresses with its clear, straightforward design and is the perfect solution for professional lighting of all types of traffic routes. Its housing, made of grey powder-coated die-cast aluminum, not only ensures high durability but also presents an aesthetic appearance that seamlessly integrates into various environments. Equipped with highly efficient LED technology and an innovative lens system, the luminaire delivers uniform and optimal light distribution. The cover made of transparent, tempered glass protects the luminaire from external influences, ensuring a long service life. The luminaire is extremely weather-resistant and robust. Thanks to stainless steel clamping screws, installation is quick and hassle-free. Adapters for wall and pole mounting are also available upon request.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	MOUNTING HEIGHT	WEIGHT
STM2020.XXX14	19W	2.600lm	2200K 2700K 3000K 4000K	4-6m	5,3kg
STM2040.XXX14	39W	5.100lm		4-8m	7,2kg
STM2060.XXX14	65W	8.400lm			
STM2080.XXX14	74W	10.300lm			
STM2100.XXX14	101W	13.800lm			
STM2120.XXX14	112W	14.600lm			



1 Control
1... ON-OFF switchable
2... DALI dim
6... Automatic DIM profile

2 Light distribution
2... STREET01
3... WIDE01
L... CROSSWALK left
R... CROSSWALK right

3 Colour temp.
1... 2200K
2... 2700K
3... 3000K
4... 4000K

Installation and maintenance

Tool-free opening of the luminaire, simplifies installation and maintenance

Automatic DIM profile




A customised, autonomous dimming profile with time intervals and light levels is programmed into the LED control gear. No additional wiring is required on the luminaire.

Full cut-off system




Luminaires that are shielded upwards and do not emit light in and above the horizontal.

Light distribution



STREET01
155°x45°


WIDE01
144°x50°



CROSSWALK
left

CROSSWALK
right

Dimensions

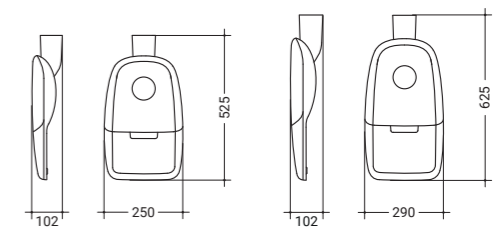

19W/39W/65W

74W/101W/112W



Masts and accessories



Full range of steel and aluminium poles and accessories available – page 116.

What's new:

ZHAGA Interface

Integrated Zhaga interface according to Zhaga Book 18 Ed 3 for easy connection of external control components

