

06 Einbaustrahler CAPICO



LUMINAIRE

recessed
aluminium
powder-coated white
IP20

LED

3000K, 4000K
CRI>80
3-Step MacAdam
ON-OFF, DALI

LED LIFETIME (est.)


50.000h L80

OPTICS

beam angle 60° / 90°, UGR19 / 22

DE Vielseitiges und kompaktes Downlight aus Aluminiumdruckguss mit umlaufendem Rand und passivem Thermomanagement. Hochglänzend eloxierter Aluminiumreflektor mit feiner Wabenstruktur und präziser Abstrahlcharakteristik. CAPICO verbindet Effizienz und Funktionalität mit einem ansprechenden Erscheinungsbild und ist ein perfektes Lichtwerkzeug für Empfang, Flur, Büro, Konferenzraum, Shop oder Museum. Die werkzeuglose Montage erfolgt durch zwei Spannfedern.

EN Versatile, compact downlight made from die-cast aluminium with wraparound edge and passive thermal management. High-gloss anodised aluminium reflector with fine honeycomb structure and precise beam characteristics. CAPICO combines efficiency and functionality with visual appeal and is a perfect lighting tool for reception areas, hallways, offices, conference rooms, shops or museums. Installation is by means of two tension springs. No tools required.




Downlights 06 CAPICO


ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	CUT OUT
DLCA016.X2X22	16W	1.650lm	3000K / 4000K	Ø 190mm	Ø 150-165mm
DLCA021.XXX22	21W	2.300lm		Ø 230mm	Ø 205-215mm
DLCA032.XXX22	32W	3.300lm			

.X|X|X -- 1 control 2 optics 3 colour temp.
 1 1 ON/OFF 1 1 WIDE 90° 3 3 3000K
 2 2 DALI 2 2 MEDIUM 60° 4 4 4000K

Lichtkurven | Lightcurves

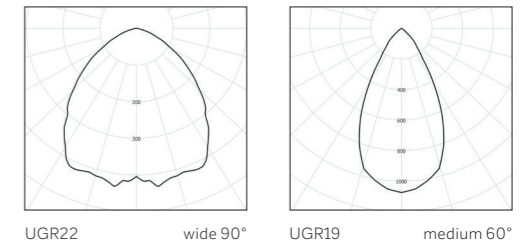

Technische Skizzen | Technical sketches

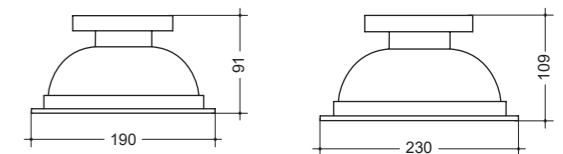

White powder coated frame

Pure aluminium reflector

LED unit with glare-free special lens

