

# 02 Flutlichtstrahler LS



## LUMINAIRE

surface mounted  
aluminium, steel  
powder-coated black  
IP65, IK08

## LED

5000K  
CRI>70  
4-Step MacAdam  
ON-OFF

## LED LIFETIME (est.)

80.000h L80

## OPTICS


beam angle 60° / 100°

## OPTIONS

tripod

**DE** Unser Alleskönner im Bereich Außenbeleuchtung. Kompakter und schlanker Flutlichtstrahler aus Aluminiumdruckguss in 2 Leistungsstärken. Robustes und widerstandsfähiges Gehäuse für härteste Umgebungsbedingungen. Vielseitig einsetzbar zur flächigen Beleuchtung von Plätzen und Fassaden. Hocheffiziente und langlebige Leuchtdioden mit gleichmäßiger Lichtverteilung. Integriertes Vorschaltgerät mit Temperatur-Überwachung. Schwenkbarer Montagebügel für hängende Montage geeignet.

**EN** Our all-rounder among outdoor lighting. Compact, streamlined floodlight made of die-cast aluminium available in 2 different power ratings. Robust, durable housing for the toughest environmental conditions. Versatile, wide-area illumination of facades and open spaces. Highly efficient, long-lasting light-emitting diodes with homogeneous light distribution. Integral ballast with temperature control. Swivel-mounted fixing brackets suitable for suspended installation.

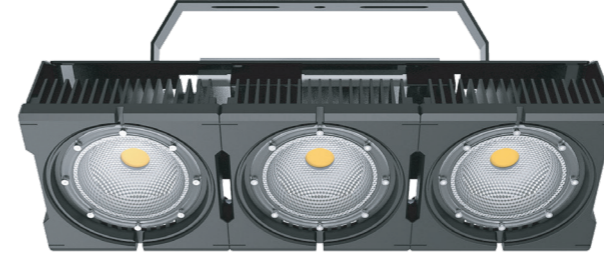

# Floodlights 02 LS


ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
FLLS135.1X513	135W	15.400lm	5000K	6kg
FLLS160.1X513	160W	18.500lm		7,7kg



saltwater resistant coating



Lichtkurven | Lightcurves




wide 100°



medium 60°

Technische Skizzen | Technical sketches

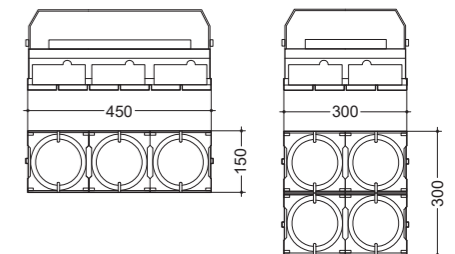

Leuchte mit 3m Anschlusskabel konfektioniert.  
Luminaire assembled with 3m connection cable



ORDER CODE	BESCHREIBUNG   DESCRIPTION	Zubehör   Accessories
FLLSZB020	Schwerlast Stativ   heavy load tripod	