

09 Anbau-Pendelleuchten OFFICE



LUMINAIRE

surface mounted, suspended
steel, PMMA
powder-coated white
IP40

LED

3000K, 4000K
CRI>80
3-Step MacAdam
ON-OFF, DALI

LED LIFETIME (est.)

80.000h L80

OPTICS


PMMA opal

OPTIONS

cord suspension set
circadian technology

DE Funktionalität und schlichtes zeitloses Design stehen bei dieser Langfeldleuchte im Vordergrund. OFFICE bietet enorm vielseitige und vor allem wirtschaftliche Lichtlösungen für fast jede Art von Innenräumen. Die Leuchte kann wahlweise mit Raster-einheit oder komplett opaler Abdeckung gefertigt werden. In opaler Ausführung ist die Leuchte auch in IP54 erhältlich. Beide Ausführungen sind zur direkten Deckenanbau-oder Pendelmontage geeignet.

EN Functionality and simple timeless design are the main focus of this linear luminaire. OFFICE offers enormously versatile and above all economical lighting solutions for almost every type of interior. The luminaire can be manufactured with either a louvre unit or a completely opal diffuser. The opal version of the luminaire is also available in IP54. Both versions are suitable for direct ceiling surface mounting or pendant mounting.




Surface mounted and suspended luminaires 09 OFFICE

ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	DIMENSION	OPTICS	COLOUR TEMP.	WEIGHT
ALOF028.XEX22	28W	2.900lm	1200x135x55	louvre	3000K / 4000K	3,7kg
ALOF044.XEX22	44W	4.800lm	1500x135x55			5,1kg
ALOO021.XAX22	21W	2.000lm	1260x105x95	opal	3000K / 4000K	2,3kg
ALOO043.XAX22	43W	4.100lm				2,3kg
ALOO031.XAX22	31W	3.200lm	1560x105x95			2,7kg
ALOO044.XAX22	44W	4.300lm				2,7kg

.X -X - - 1 control 3 colour temp.
1 ON/OFF 3 3000K
2 DALI 4 4000K



Lichtkurven | Lightcurves

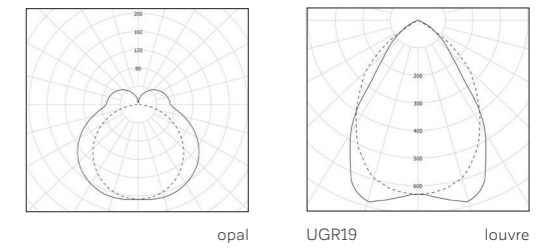

Technische Skizzen | Technical sketches

