

08 Einbauleuchten PLANELO Premium



DE Ultraflaches, mehrschichtiges Lichtfeld mit minimalistischem Design aus Aluminium und umlaufendem weißem Rand. Abgestimmt für den Einbau in Moduldecken M600 bzw. M625 vereint PLANELO alle Eigenschaften für eine moderne und blendfreie Arbeitsplatzbeleuchtung nach DIN EN 12464-1 (UGR<19). Der mikroprismatische Diffusor mit intelligenter Lichtauskopplung und hochreflektierender Beschichtung liefert eine absolut homogene Lichtverteilung. Das vielseitige Zubehör bietet zusätzliche Montagemöglichkeiten.

EN Ultra-flat multi-layer light field with minimalist design in aluminium and with white wraparound edge. Tailored for installation in modular ceilings M600 and M625, PLANELO combines all the features of modern, glare-free workplace lighting according to DIN EN 12464-1 (UGR<19). The microprismatic diffuser with intelligent light extraction and a highly reflective coating provides maximum homogenous light distribution. The versatile accessories create additional installation options.

LUMINAIRE

suspended, surface mounted, recessed aluminium powder-coated white IP20

LED

3000K, 4000K, 5000K
CRI>80
3-Step MacAdam
ON-OFF, 1-10V, 3-Step DIM, DALI

LED LIFETIME (est.)


50.000h L80

OPTICS

microprismatic, UGR19

OPTIONS

surface mounting set
pendant mounting set




Recessed luminaires 08 PLANELO Premium


ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	WEIGHT
LFPQ018.XBX22.P	18W	1.800lm	3000K 4000K 5000K	295x295mm	1kg
LFPQ038.XBX22.P	38W	3.900lm		620x620mm	2kg
LFPR038.XBX22.P	38W			1195x295mm	

Sondermaße auf Anfrage
Special dimensions on request


1	2	3	4	5
control	colour temp.			
1 ON/OFF	3 3000K			
2 DALI	4 4000K			
3 DIM 1-10V	5 5000K			
4 DIM 3-STEP				

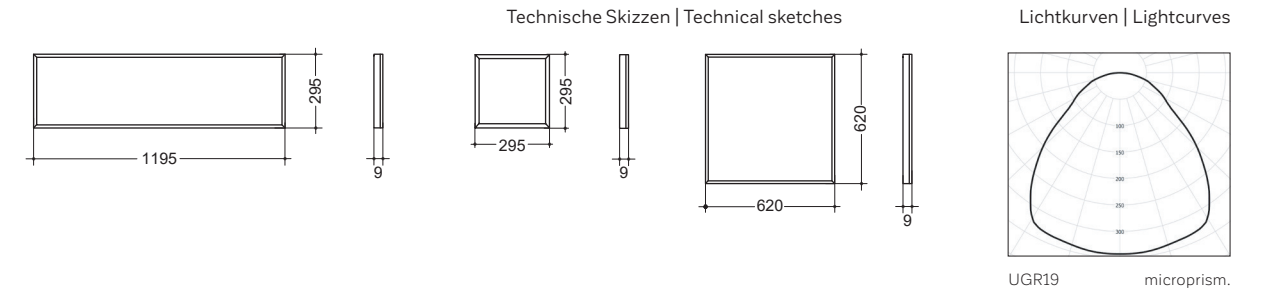

super slim frame



microprismatic UGR <19




Aluminium base plate

3-layer microprism. diffuser

Highly efficient LED unit

Slim aluminium frame, white powder coated

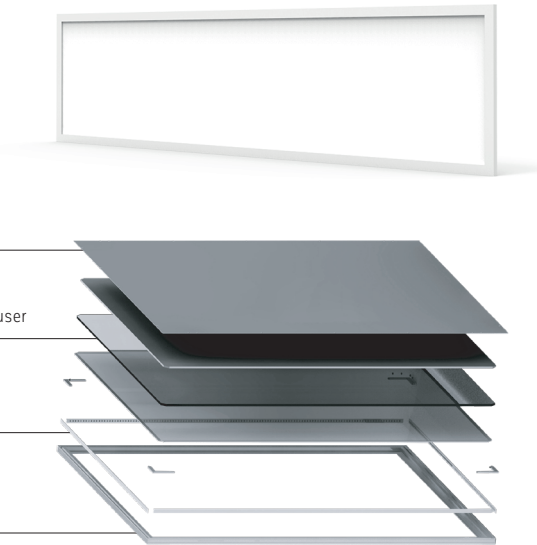


installation clamps



Y-cord suspension kit



surface frame



ORDER CODE	BESCHREIBUNG DESCRIPTION	Zubehör Accessories
LFPQB010	Aufbauahmen 625x625x50mm, weiß surface frame 625x625x50mm, white	
LFPQB011	Aufbauahmen 300x300x50mm, weiß surface frame 300x300x50mm, white	
LFPQB020	Y-Seilsystem, 2er SET, 1500mm Y-cord suspension kit, 2pcs SET, 1500mm	
LFPQB031	Einbauklammen, 4er SET installation clamps, 4pcs SET	
LFPRZB010	Aufbauahmen 1200x300x50mm, weiß surface frame 1200x300x50mm, white	
LFPRZB030	Ausschnitt-Reduzierrahmen 1245x308mm, weiß Cut-out reduction frame 1245x308mm, white	

