

09 Anbau-Pendelleuchten WARO2



DE Elegante Lichtleiste in 5 Grundlängen aus Aluminiumstrangpressprofil. Für gehobene Ansprüche in der Architektur in kantiger Ausführung. WARO2 ist als Einzelleuchte oder zusammenhängende, frei gestaltbare Lichtbandstruktur konfigurierbar und bietet einen schattenfreien Lichtübergang zwischen den einzelnen Elementen. Der Diffusor ist wahlweise in opal oder mikroprismatisch ausgeführt und glänzt mit absolut homogener Ausleuchtung. Leuchtende Eckverbinder schaffen höchste Flexibilität für die Lichtbandstruktur und können auch als Einzeleuchten verwendet werden.

EN An elegant lighting strip in 5 basic lengths made from extruded aluminium profile. The angular design fulfils the highest demands on architecture. WARO2 is designed as an individual luminaire or as customizable continuous-row lighting and provides shadow-free transition between the individual elements. The diffuser is available in a choice of opal or microprismatic design and excels through its completely uniform illumination. Luminous corner connectors enable the light line to be configured with maximum flexibility and can also be used as individual luminaires.

LUMINAIRE

suspended, surface mounted
aluminium
aluminium anodized
IP44, IK04

LED

3000K, 4000K
CRI>80
3-Step MacAdam
ON-OFF, DALI

LED LIFETIME (est.)


60.000h L80

OPTICS

opal
microprismatic UGR19

OPTIONS

illuminated node connectors
node connectors
recessed version
different housing colours



Surface mounted and suspended luminaires 09 WARO2

ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	LENGTH	COLOUR TEMP.
LBW2009.XXX2X	9W	1.050lm	572mm	3000K / 4000K
LBW2014.XXX2X	14W	1.800lm		
LBW2017.XXX2X	17W	2.100lm	1132mm	
LBW2028.XXX2X	28W	3.550lm		
LBW2021.XXX2X	21W	2.600lm	1412mm	
LBW2035.XXX2X	35W	4.400lm		
LBW2026.XXX2X	26W	3.150lm	1692mm	
LBW2042.XXX2X	42W	5.300lm		
LBW2034.XXX2X	34W	4.200lm	2252mm	
LBW2056.XXX2X	56W	7.050lm		



WARO L

LBW2L17.XXX2X	17W	2.100lm	593x593mm	3000K / 4000K
LBW2L28.XXX2X	28W	3.550lm		

WARO T

LBW2T26.XXX2X	26W	3.150lm	1126x593mm	3000K / 4000K
LBW2T42.XXX2X	42W	5.300lm		

WARO X

LBW2X34.XXX2X	34W	4.200lm	1126x1126mm	3000K / 4000K
LBW2X56.XXX2X	56W	7.050lm		

1	2	3	4	5
control	optics	colour temp.	material colour	
1 ON/OFF	A OPAL	3 3000K	1 ALUMINIUM ELOX.	
2 DALI	B MICROPRISM.	4 4000K	2 WHITE	
			3 BLACK	


PC diffuser opal




microprism. PMMA diffuser



uninterrupted light




Lichtkurven | Lightcurves

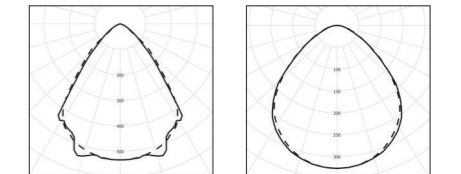

UGR19 microprism. opal

Technische Skizzen | Technical sketches

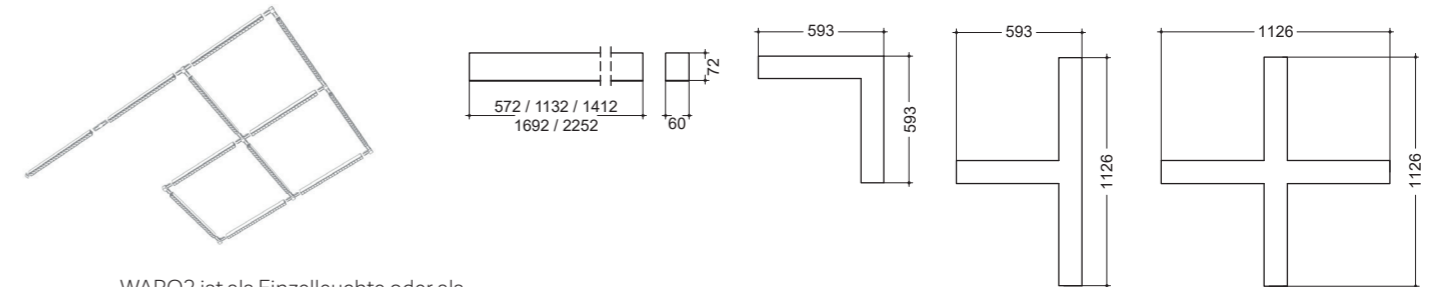

WARO2 ist als Einzeleuchte oder als zusammenhängende Lichtbandstruktur konfigurierbar und bietet einen schattenfreien Lichtübergang zwischen den einzelnen Elementen.

WARO2 is designed as an individual luminaire or as continuous-row lighting, and provides shadow-free transition between the individual elements.



ORDER CODE	BESCHREIBUNG DESCRIPTION	Zubehör Accessories
LBW2ZB010	Seilsystem 1600mm mit Einspeisung 3-polig, ON/OFF	cord suspension 1600mm incl. 3-phase power feed in, ON/OFF
LBW2ZB020	Seilsystem 1600mm mit Einspeisung 5-polig, DALI	cord suspension 1600mm incl. 5-phase power feed in, DALI
LBW2ZB030	Seilsystem 1600mm	cord suspension 1600mm

