# AEROX2

Quickinfo

LUMINAIRE
ceiling, wall
suspended, surface mounted
aluminium, white
IP65, IK10

LED
4000K
CRI>80
initial MacAdam 4 SDCM
60.000h L80

OPTIC
symmetric 90° UGR25

ELECTRIC
ON-OFF switchable

ON
OFF

~230 V
50–60Hz

IP 65   IK 10   IFS HACCP

CE   future proof

Description

Our powerful all-rounder in the area of high bay lighting. Made of powder-coated white aluminium. The use of highly efficient light-emitting diodes and a precise lens system achieves high luminous efficacy and efficiency. With its slim and elegant design, the AEROX2 is ideal for industrial halls as well as for sales and presentation rooms. The extensive range of accessories offers great flexibility for mounting.

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
HLA2100.13422	100W	14.900lm	4000K	3,5kg
HLA2150.13422	150W	22.000lm		
HLA2200.13422	200W	29.500lm		4,5kg

Optic

UGR<25   MEDIUM 90°

Dimension

204
296
100W/150W

233
339
200W
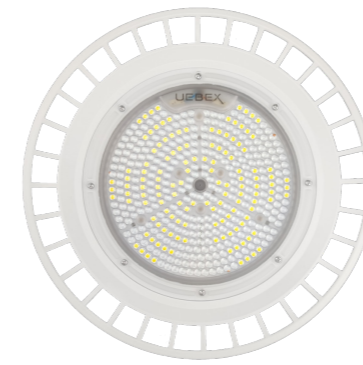
Accessories

PRODUCT CODE	DESCRIPTION
HLA2ZB010	Mounting bracket swivelling for AEROX2 100W/150W
HLA2ZB011	Mounting bracket swivelling for AEROX2 200W
HLMKZB020	2m chain for pendant mounting, incl. carabiner
HLA2ZB030	Transparent shield reflector with internal prismatic structure for AEROX2 100W/150W
HLA2ZB031	Transparent shield reflector with internal prismatic structure for AEROX2 200W
HLA2ZB050.S	Ball throwing guard for AEROX2 100W/150W
HLA2ZB051.S	Ball throwing guard for AEROX2 200W