# Floodlights **ATUR2**

## **ATUR2**

#### Quickinfo

#### LUMINAIRE

ceiling, wall, mast surface mounted aluminium, grey RAL7040 IP66, IK08





#### 3000K, 4000K CRI>80

initial MacAdam 4 SDCM 50.000h L70

#### OPTIC

symmetric 90°

#### **ELEKTRIC**

ON-OFF switchable





Œ










#### Description

Our small but powerful all-rounder in the floodlight range. Made of die-cast aluminium to the highest industrial standard. Extremely robust and resistant housing for the toughest environmental conditions. Highly efficient and long-life LEDs with uniform light distribution and high luminous flux packages. Integrated, replaceable ballast with temperature monitoring. Swivelling mounting bracket suitable for suspended and vertical mounting.

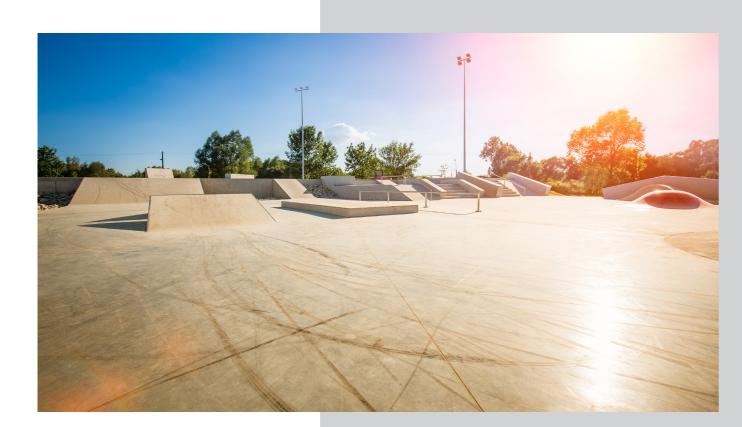

#### Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
FLA2045.13X24	45W	6.000lm	3000K 4000K	2,8kg
FLA2090.13X24	90W	12.400lm		3,8kg








ATUR2 45W






ATUR2 90W





### Dimension





22 23