

02 Floodlights ATUR2

Quickinfo

LUMINAIRE

ceiling, wall, mast
surface mounted
aluminium, grey RAL7040
IP66, IK08



LED

3000K, 4000K
CRI>80
initial MacAdam 4 SDCM
50.000h L70

OPTIC

symmetric 30° / 60° / 90°

ELEKTRIC

ON-OFF switchable
DALI dim



Description

High performance floodlight made of die-cast aluminium to the highest industry standard. Designed for major outdoor tasks. Extremely robust and resistant housing for the toughest environmental conditions. Individually swivelling light units allow for an extension of the light distribution. Highly efficient and long-life LEDs with uniform light distribution and high luminous flux packages. Integrated, replaceable ballast with temperature monitoring. Swivelling mounting bracket suitable for suspended and vertical mounting.



individually swivelling
light modules



incl. 3 metres
rubber cable

Types


PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
FLA2200.2XX24	200W	26.400lm	3000K 4000K	6,5kg
FLA2400.2XX24	400W	53.900lm		13,5kg
FLA2600.2XX24	600W	80.200lm		21,5kg
FLA2800.2XX24	800W	106.400lm		28kg



2 Optic
1... MEDIUM 60°
2... SPOT 30°
3... WIDE 90°

3 Colour Temp.
3... 3000K
4... 4000K

Optic


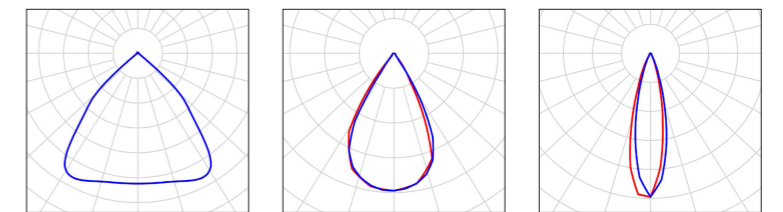


WIDE 90°

MEDIUM 60°

SPOT 30°

Dimension

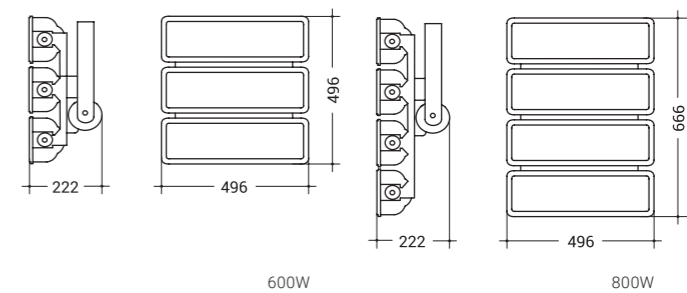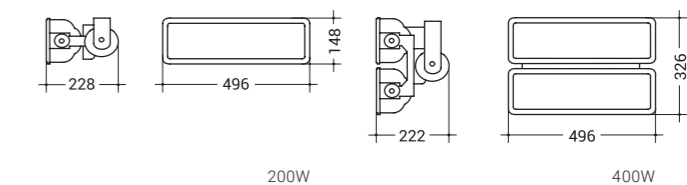

ATUR2 800W



ATUR2 400W



ATUR2 200W