

06 Downlights

CAPICO2 SQUARE

Quickinfo

LUMINAIRE

ceiling
recessed
aluminium, white
IP44, IK06



LED



3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

OPTIC

symmetric 60° UGR19

ELECTRIC

ON-OFF switchable
DALI dim
PHASE dim

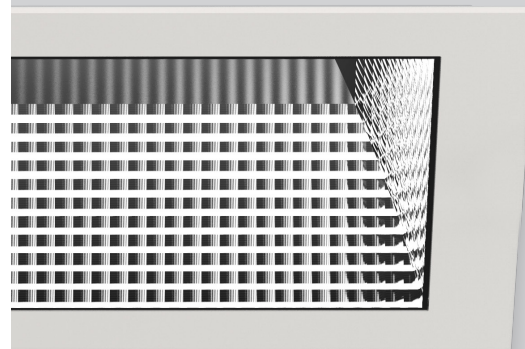

Description

Versatile and compact LED downlight made of aluminium with square cover frame in white. Coated high-gloss faceted reflector with fine honeycomb structure and precise beam characteristics. Highly efficient light source with excellent glare control and passive thermal management. CAPICO2 combines efficiency and functionality with an attractive modern appearance and is a perfect lighting tool for reception, corridor, office, conference room, shop or museum. Tool-free mounting thanks to spring-loaded clamping mechanism.

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	CUTOUT	WEIGHT
DLC2025.X1X22.S	25W	2.400lm	3000K / 4000K	190x190mm	170x170mm	1kg




1 Control
1... ON-OFF switchable
2... DALI dim
5... PHASE dim

3 Colour Temp.
3... 3000K
4... 4000K



Optic



UGR19 MEDIUM 60°



Dimension

