

06 Downlights

CAPICO2 ROUND

Quickinfo

LUMINAIRE

ceiling
recessed
aluminium, white/black
IP54, IK06



LED



3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

OPTIC

symmetric 36° UGR19
symmetric 60° UGR19-22

ELECTRIC

ON-OFF switchable
DALI dim
PHASE dim

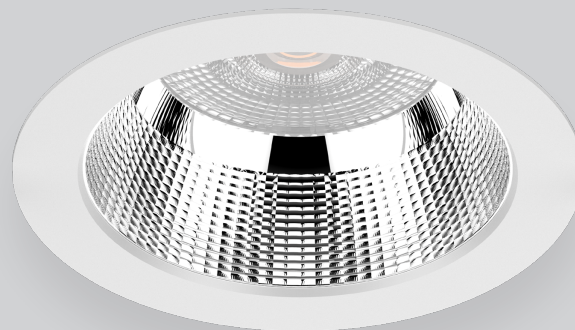

Description

Versatile and compact LED downlight made of aluminium with a removable cover frame in white or black. Coated high-gloss faceted reflector with fine honeycomb structure and precise beam characteristics. Highly efficient light source with excellent glare control and passive thermal management. CAPICO2 combines efficiency and functionality with an attractive modern appearance and is a perfect lighting tool for reception, corridor, office, conference room, shop or museum. Tool-free mounting thanks to spring-loaded clamping mechanism.

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	CUTOUT	WEIGHT
DLC2S13.XXX2X	13W	1.300lm	3000K 4000K	Ø110mm	Ø90-95mm	0,3kg
DLC2M20.XXX2X	20W	2.300lm		Ø172mm	Ø150-165mm	0,7kg
DLC2L25.XXX2X	25W	3.000lm		Ø228mm	Ø200-210mm	1,1kg
DLC2L35.XXX2X	35W	4.100lm				

.X|X|X|X|X
1 2 3 5

1 Control
1... ON-OFF switchable
2... DALI dim
5... PHASE dim

2 Optic
1... MEDIUM 60°
2... SPOT 36°

3 Colour Temp.
3... 3000K
4... 4000K

5 Housing colour
2... white
3... black




Reflector

Tool-free insertable reflector for individual design and adjustment.


PRODUCT CODE	DESCRIPTION
DLC2XZB020.1	Faceted reflector high-gloss
DLC2XZB020.3	Reflector black glossy

X Size
S... for housing Ø110mm
M... for housing Ø172mm
L... for housing Ø228mm

Combinations

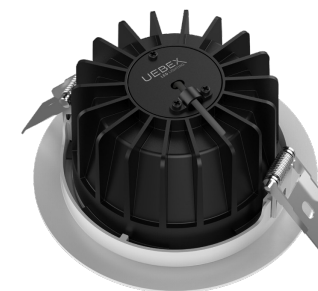

Optic

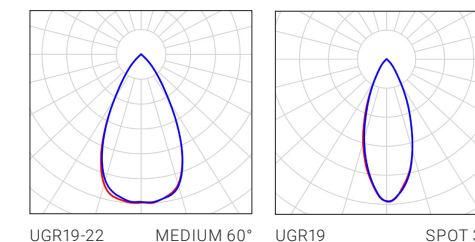

Dimension

