


01 High-bay luminaires HB3

Quickinfo

LUMINAIRE

ceiling, wall
suspended, surface mounted
aluminium, grey
IP65, IK09



LED

4000K
CRI>80
initial MacAdam 4 SDCM
65.000h L80

OPTIC

symmetric 65° UGR22
symmetric 85° UGR22

ELECTRIC

ON-OFF switchable
DALI dim



Description

High-performance high-bay luminaire with enormous efficiency and perfected light distribution. Precise light control and high glare reduction by special MLL optics (Multiple LED Lens). Robust, rotationally symmetric housing, powder-coated with high functionality. Innovative smooth design with optimised passive thermal management and intelligently directed airflow. Minimal dust accumulation and enormously long service life. Great flexibility during installation and optimised maintenance.




Types

| PRODUCT CODE | POWER | LUMINOUS FLUX | COLOUR TEMP. | WEIGHT |
|---------------|-------|---------------|--------------|--------|
| HLH3120.2X424 | 120W | 20.100lm | 4000K | 5,5kg |
| HLH3200.2X424 | 200W | 32.400lm | | |


1 X
2
2 Optic
2... SPOT 65°
3... MEDIUM 85°

Optic



UGR22


SPOT 65°




UGR22

MEDIUM 85°

Dimension



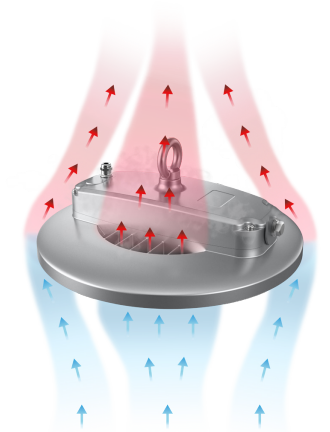

innovative MLL optics for precise light control



optimised, passive thermal management

Accessories

| | PRODUCT CODE | DESCRIPTION |
|---|--------------|--|
|  | HLH3ZB010 | Mounting bracket, swivelling |
|  | HLMKZB020 | 2m chain for pendant mounting, incl. carabiner |

