


08 Surface and suspended luminaires

LUXO EVO2

Quickinfo

LUMINAIRE

ceiling
surface mounted, suspended
aluminium, white/black
IP20



LED


3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

OPTIC

reflector direct 65° UGR 19
microprismatic direct 75° UGR 22
opal wide indirect


ELECTRIC

ON-OFF switchable
DALI dim



Description

Elegant linear light profile for the design of workspaces, presentation areas and general spaces. Made of aluminum and high-quality coated in the colors white or black. Optionally expandable with an indirect light module, which creates a soft and pleasant ambient lighting. The special multi-chamber reflector MCR (UGR<19) makes the light source almost invisible and provides precise light direction. Using accessories, LUXO EVO2 can also be extended into a seamless light band structure.

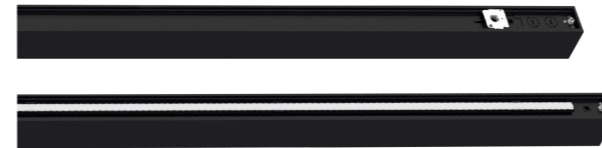

Light module indirect

The separate LIGHT MODULE INDIRECT is simply placed and connected on the luminaire


^ 30%
Optic
v 70%

Optic


Microprism structure for reduced luminance

Multi-chamber reflector for controlled light distribution

Optic




UGR22 MICROPRISMATIC
incl. indirect light module

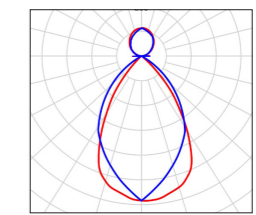

UGR19 REFLECTOR 65°
incl. indirect light module

Dimension



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	LENGTH	WEIGHT
PLL2036.XXX2X	36W	3.700lm	3000K / 4000K	1212mm	2,3kg

LIGHT MODULE INDIRECT

PLL2IM09.0AX21	9W	1.400lm	suitable for microprismatic version
PLL2IM12.0AX21	12W	1.500lm	suitable for reflector version

.X|X|X|X|X
1 2 3 5

1 Control
1... ON-OFF switchable
2... DALI dim

2 Optic
B... MICROPRISMATIC
E... REFLECTOR 65°

3 Colour Temp.
3... 3000K
4... 4000K

5 Housing colour
2... white
3... black

Accessories

	PRODUCT CODE	DESCRIPTION
	PLL2ZB010	Rope suspension 1,5m, Set of 1pcs
	PLL2ZB020.W	Ceiling rose white, incl. 1,5m cable 3-pole and rope
	PLL2ZB021.W	Ceiling rose white, incl. 1.5m cable 5-pole and rope
	PLL2ZB020.S	Ceiling rose black, incl. 1.5m cable 3-pole and rope
	PLL2ZB021.S	Ceiling rose black, incl. 1.5m cable 5-pole and rope
	PLL2ZB050	Luminaire connector, linear




LUXO EVO2

Quickinfo

LUMINAIRE

ceiling
surface mounted, suspended
aluminium, white/black
IP20



LED


3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

OPTIC

reflector direct 65° UGR 19
microprismatic direct 75° UGR 22
opal wide indirect

ELECTRIC

ON-OFF switchable
DALI dim



Description

Elegant linear light profile for the design of workspaces, presentation areas and general spaces. Made of aluminum and high-quality coated in the colors white or black. Optionally expandable with an indirect light module, which creates a soft and pleasant ambient lighting. The special multi-chamber reflector MCR (UGR<19) makes the light source almost invisible and provides precise light direction. Using accessories, LUXO EVO2 can also be extended into a seamless light band structure.

Types


PRODUCT CODE	POWER	LUMINOUS FLUX	OPTIC	COLOUR TEMP.	WEIGHT
PLL2L10.XBX2X	10W	1.100lm	microprismatic	3000K / 4000K	0,8kg
PLL2L13.XEX2X	13W	1.300lm	reflector		0,9kg

X X X
1 3 5


1 Control
 1... ON-OFF switchable
 2... DALI dim

3 Colour Temp.
 3... 3000K
 4... 4000K


5 Housing colour
 2... white
 3... black

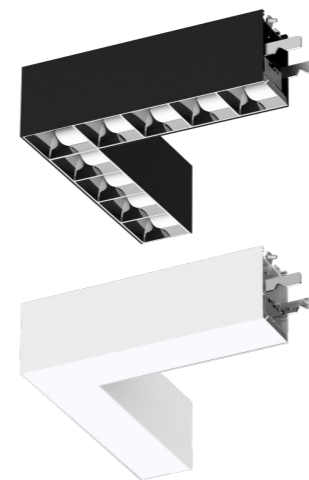

Optic

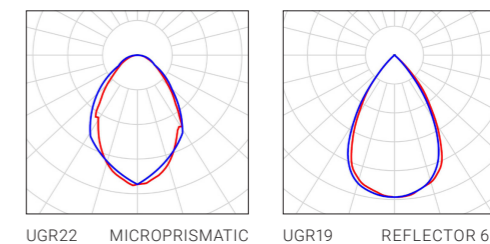


Dimension

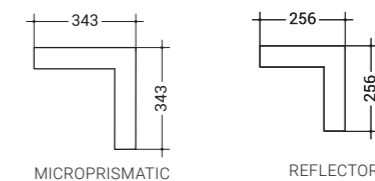

Optic

- Microprism structure for reduced luminance
- Multi-chamber reflector for controlled light distribution

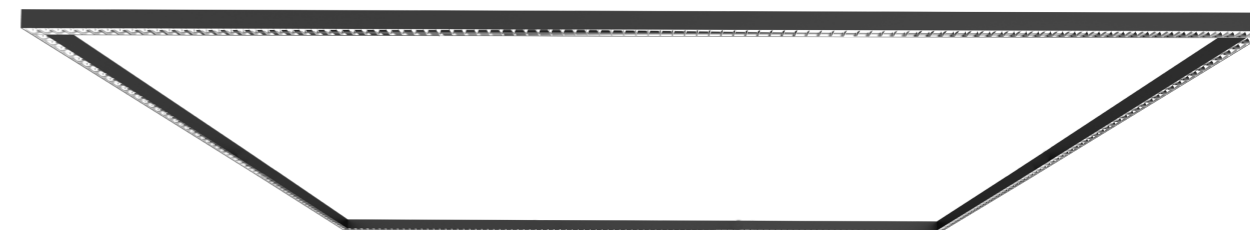

LUXO EVO2 is configurable as an individual luminaire or configurable as a continuous row structure and offers a seamless transition between the individual elements..