

08 Surface and suspended luminaires

PLANARIO EDGE

Quickinfo

LUMINAIRE

ceiling, wall
surface mounted, suspended
aluminium, white/black
IP40



LED

3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

OPTIC

microprism. wide UGR21

ELECTRIC

ON-OFF switchable
PHASE dim



Description

Pure elegance paired with timeless design. Powder-coated aluminium housing with clear edges and recessed luminous surface. Luminaire body set back with shadow gap and discreet indirect light component. The microprismatic diffuser ensures increased eye comfort and a homogeneous optic. Use of highly efficient LEDs with very good colour rendering. Versatile mounting options on wall and ceiling.



Types

PRODUCT CODE	CONTROL	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIAMETER	WEIGHT
ALPE040.5BC2X	PHASE dim	40W	3.700lm	3000K - 4000K adjustable	Ø400mm	3,2kg
ALPE060.1BX2X	ON-OFF switchable	42-60W	3.900 - 5.500lm	3000K 4000K	Ø600mm	6,9kg
ALPE075.1BX2X		47-75W	4.500lm - 7.200lm		Ø800mm	11kg


X X 3 5

3 Colour Temp. 3... 3000K
4... 4000K

5 Housing colour
2... white
3... black




Optic



\wedge 15%
 Optic
 \vee 85%

UGR21 MICROPRISMATIC

Dimension

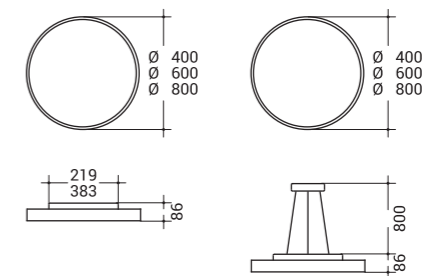

EB Multilumen



One luminaire, different luminous intensities

Different power levels can be set using dip switches.

Multicolour



One luminaire, different colour temperatures

Different colour temperatures can be set using dip switches.

Optic



Microprism structure for reduced luminance



Accessories

	PRODUCT CODE	DESCRIPTION
	ALPEZB010.2	Ceiling rose white, incl. 0,8m cable 3-pole and three point rope suspension
	ALPEZB010.3	Ceiling rose black, incl. 0,8m cable 3-pole and three point rope suspension