


07 Recessed luminaires PLANARIO REC

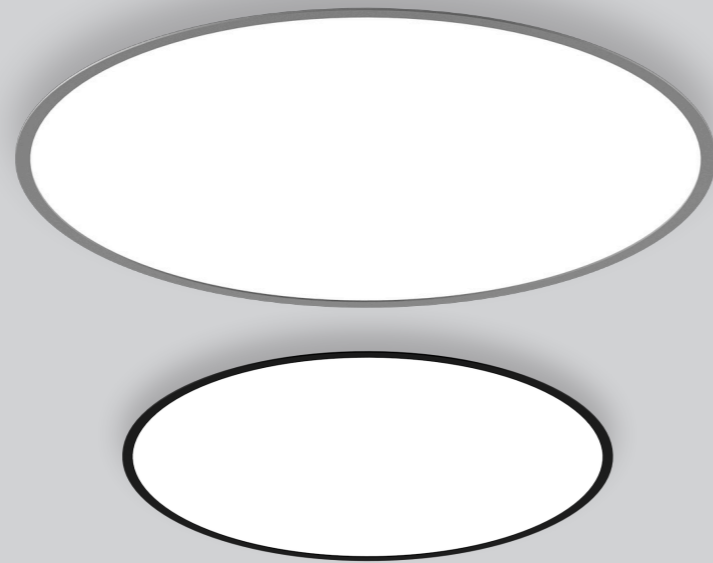

Quickinfo

LUMINAIRE

ceiling
recessed
aluminium
white/black/grey/RAL
IP20



LED


3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
60.000h L90

OPTIC

opal wide
microprism. wide

ELECTRIC

ON-OFF switchable
DALI dim



Description

The elegant and timeless design of the recessed luminaire PLANARIO REC finds versatile application in modern architectural lighting concepts. The housing features clear edges and a minimalist surrounding border made of powder-coated aluminium. Various sizes and colors allow for a wide range of design options. The opal diffuser creates a soft and uniform optic, spreading its effect particularly well in large spaces. Alternatively, a microprismatic diffuser is available for reduced luminance.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	CUTOUT	WEIGHT
ELPL017.XXX2X	16W	1.900lm	3000K 4000K	Ø366mm	358mm	2,7kg
ELPL024.XXX2X.3	20W	2.500lm		Ø466mm	458mm	4kg
ELPL024.XXX2X.4	23W	2.800lm		Ø666mm	658mm	7,5kg
ELPL039.XXX2X	34W	4.000lm		Ø966mm	958mm	15kg
ELPL034.XXX2X	33W	4.500lm				
ELPL054.XXX2X	47W	6.200lm				
ELPL077.XXX2X	71W	10.400lm				
ELPL130.XXX2X	112W	15.700lm				

. | X | X | X | - | X
1 | 2 | 3 | 5

1 Control
1... ON-OFF switchable
2... DALI dim

2 Optic
A... OPAL
B... MICROPRISMATIC

3 Colour Temp.
3... 3000K
4... 4000K

5 Housing colour
2... white
3... black
4... grey
5... anthracite
8... rusty iron
9... RAL

Optic




Microprism structure for reduced luminance




Smooth opal structure for soft illumination

Optic




OPAL



MICROPRISMATIC

Dimension



RAL Colour



Colour coating of the luminaire in various RAL colours possible

Surface refinement

During the final finishing process of PLANARIO, a special epoxy powder is used. The surface is finely textured after treatment and can be chosen as an option to be either smooth and glossy or matte.

