


PLANARIO

Quickinfo

LUMINAIRE

ceiling, wall
recessed, surface mounted, suspended
aluminium
white/black/grey/RAL
IP20



LED

3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
60.000h L90

OPTIC

opal wide
microprism. wide

ELECTRIC

ON-OFF switchable
DALI dim



Description

The elegant and timeless design of the surface and suspended luminaire PLANARIO finds versatile application in modern architectural lighting concepts. The housing features clear edges and a minimalist surrounding border made of powder-coated aluminum. Various sizes and colors allow for a wide range of design options. The opal diffuser creates a soft and uniform optic, spreading its effect particularly well in large spaces. Alternatively, a microprismatic diffuser is available for reduced luminance.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIAMETER	WEIGHT
XLPL017.XXX2X	16W	1.900lm	3000K 4000K	Ø 350mm	2,7kg
XLPL024.XXX2X.3	20W	2.500lm		Ø 450mm	4kg
XLPL024.XXX2X.4	23W	2.800lm		Ø 650mm	7,5kg
XLPL039.XXX2X	34W	4.000lm		Ø 900mm	15kg
XLPL034.XXX2X	33W	4.400lm		Ø 1240mm	23kg
XLPL054.XXX2X	47W	6.200lm			
XLPL077.XXX2X	71W	10.400lm			
XLPL130.XXX2X	112W	15.700lm			
XLPL137.XXX2X	122W	18.000lm			
XLPL242.XXX2X	203W	28.200lm			

X Installation way
1 A... surface mounting
1 P... pendant mounting


X Control
1 1... ON-OFF switchable
2 2... DALI dim

X Optic
1 A... OPAL
2 B... MICROPRISMATIC


X Colour Temp.
3 3... 3000K
4 4... 4000K

X Housing colour
2 ... white
3 ... black
4 ... grey
5 ... anthracite
8 ... rusty iron
9 ... RAL


Optic




Optic

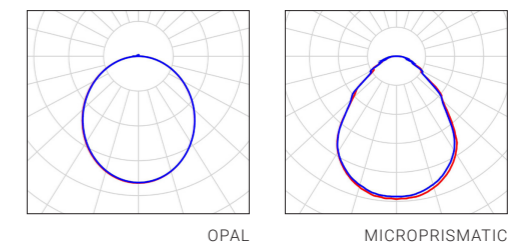

Dimension

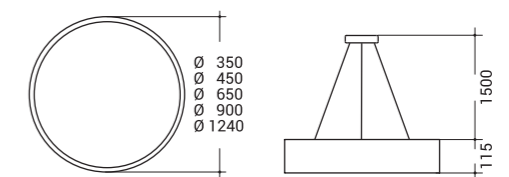

RAL Colour



Surface refinement

During the final finishing process of PLANARIO, a special epoxy powder is used. The surface is finely textured after treatment and can be chosen as an option to be either smooth and glossy or matte.

