


## 04 Luminaires with higher degree of protection

# POLEDO SLIM3

### Quickinfo

#### LUMINAIRE

ceiling, wall  
suspended, surface mounted  
polycarbonat, white  
IP65, IK08



#### LED

3000K, 4000K  
CRI>80  
initial MacAdam 4 SDCM  
50.000h L80

#### OPTIC

opal wide

#### ELECTRIC

ON-OFF switchable



### Description

Versatile moisture-proof luminaire in modern, slim design for a wide range of applications. One-piece enclosed housing made of impact-resistant polycarbonate. Thanks to the opal diffuser with wide and homogeneous light distribution, POLEDO SLIM3 is also suitable for low room heights, e.g. in underground garages and storage areas. Selectable output levels thanks to MULTILUMEN function. Easy installation with EASY CONNECT on both sides of the luminaire and integrated through-wiring in 3x2.5mm<sup>2</sup>.



### Easy Connect

for easy connection

### EB Multilumen



#### One luminaire, different luminous intensities

Different power levels can be set using dip switches.


### Types

PRODUCT CODE	POWER	LUMINOUS FLUX	LENGTH	COLOUR TEMP.	WEIGHT
FRPSF20.1A X22.4D	20W	3.000lm	629mm	3000K 4000K	0,6kg
FRPS040.1A X22.4D	20-40W	2.900 - 5.800lm	1175mm		1,5kg
FRPS060.1A X22.4D	30-60W	4.500 - 8.900lm	1450mm		1,6kg




3 Colour Temp.  
3... 3000K  
4... 4000K

### Optic



OPAL 120°

### Dimension

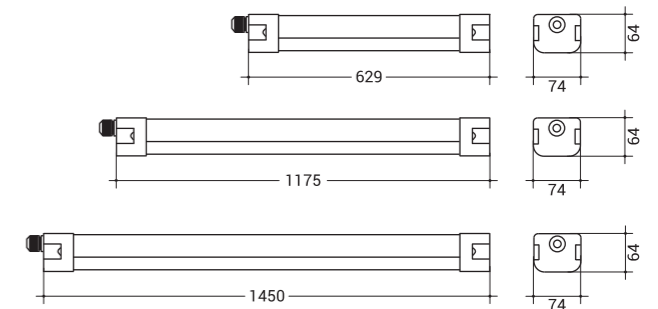



### Through-wiring



incl. 3x2,5mm<sup>2</sup>  
through-wiring



### Accessories

	PRODUCT CODE	DESCRIPTION
	FRMSZB030	Mounting bracket swivelling, Set of 2pcs
	FRPSZB040	Rope suspension 1,5m, Set of 2pcs

