


04 Luminaires with higher degree of protection

POLEDO2

Quickinfo

LUMINAIRE

ceiling, wall
suspended, surface mounted
aluminium, white
IP65, IK10



LED



3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

OPTIC

symmetric 60° / 90°
opal wide


ELECTRIC

ON-OFF switchable
DALI dim
emergency 3h



Description

Powerful and durable moisture-proof luminaire for maximum performance even under demanding environmental conditions. Housing made of highly impact-resistant polycarbonate and aluminium, maintenance-free and easy to clean if required. High-quality and inherently stable gaskets ensure maximum protection of the luminaire. Use of highly efficient light-emitting diodes and a precise lens system. Selectable power levels thanks to MULTILUMEN function. Easy installation thanks to EASY CONNECT on both sides of the luminaire and integrated through-wiring in 5x2.5mm².

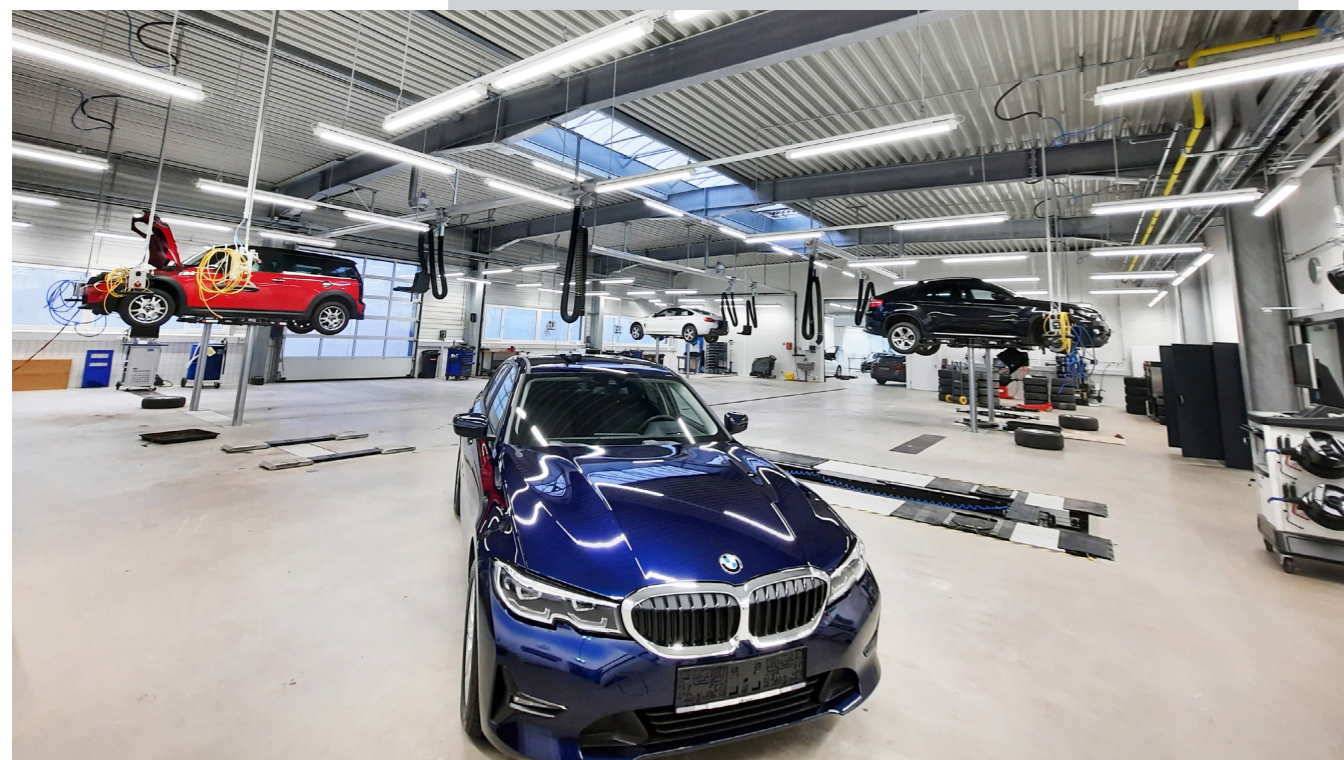

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	OPTIC	COLOUR TEMP.	WEIGHT
FRP2071.XAX22	26-71W	3.800 - 10.400lm	OPAL	3000K 4000K	3kg*
FRP2075.XXX22	25-75W	3.700 - 11.100lm	MEDIUM 60° WIDE 90°		




1 Control
1... ON-OFF switchable
2... DALI dim
8... emergency 3h 10W

2 Optic
1... WIDE 90°
2... MEDIUM 60°


3 Colour Temp.
3... 3000K
4... 4000K

*excl. emergency lighting function


Optic



OPAL 120°



WIDE 90°

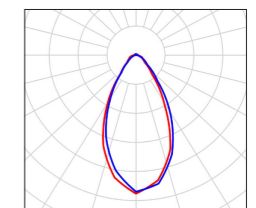

MEDIUM 60°

Easy Connect

for easy connection

EB Multilumen



One luminaire, different luminous intensities


Different power levels can be set using dip switches.

Through-wiring



incl. 5x2,5mm² through-wiring

Dimension

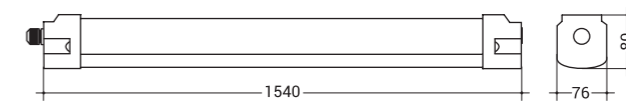

Accessories

	PRODUCT CODE	DESCRIPTION
	LBCLZB010	Rope mounting kit 2m, Set of 2pcs
	LBCLZB020	Chain mounting kit 2m, Set of 2pcs
	LBCLZB021	Chain bracket mounting kit for mounting with existing chain suspension, Set of 2pcs
	FRMSZB030	Mounting bracket swivelling, Set of 2pcs

