


WARO2

Quickinfo

LUMINAIRE

ceiling, wall
recessed, surface mounted, suspended
aluminium
white/black/silver/RAL
IP44, IK04



LED





3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
100.000h L80

OPTIC

opal wide
microprism. wide

ELECTRIC

ON-OFF switchable
DALI dim

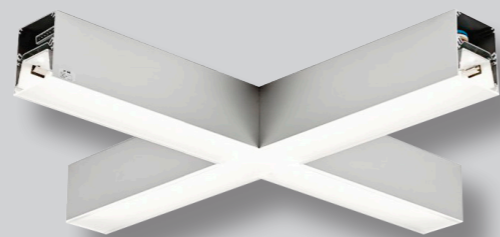

Description

Elegant continuous row luminaire in 5 basic lengths made of extruded aluminium profile. For high architectural demands in an edged design. WARO2 can be configured as an individual luminaire or as a continuous, freely configurable continuous row structure and offers a shadow-free light transition between the individual elements. The diffuser is optionally available in opal or microprismatic and shines with absolutely homogeneous optics. Luminaire corner connectors create maximum flexibility for the continuous-row structure and can also be used as individual luminaires.



Types

WARO2 L

PRODUCT CODE	POWER	LUMINOUS FLUX	DIMENSION	COLOUR TEMP.
LBW2L17.XXX2X	14W	2.000lm	593x593mm	3000K 4000K
LBW2L28.XXX2X	25W	3.400lm		

WARO2 T

LBW2T26.XXX2X	22W	3.000lm	1126x593mm	3000K 4000K
LBW2T42.XXX2X	35W	5.200lm		

WARO2 X


LBW2X34.XXX2X	28W	3.900lm	1126x1126mm	3000K 4000K
LBW2X56.XXX2X	49W	6.900lm		

. X X X X X	1 Control	2 Optic	3 Colour Temp.	5 Housing colour
1 2 3 5	1... ON-OFF switchable 2... DALI dim	A... OPAL B... MICROPRISMATIC	3... 3000K 4... 4000K	1... aluminium elox. 2... white 3... black 9... RAL


Optic

- Microprism structure for reduced luminance
- Smooth opal structure for soft illumination

Optic

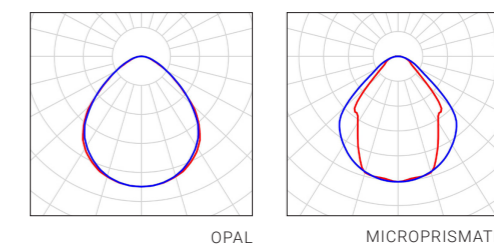

Dimension

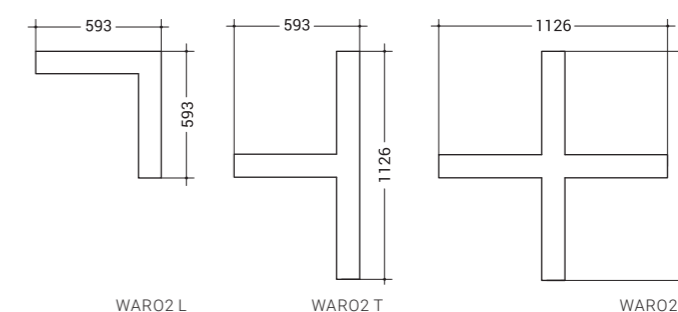

Accessories

	PRODUCT CODE	DESCRIPTION
	LBW2ZB010	Ceiling rose, incl. 1,6m cable 3-pole and rope
	LBW2ZB020	Ceiling rose, incl. 1,6m cable 5-pole and rope
	LBW2ZB030	Rope suspension 1,6m Set of 1pcs