

06 Downlights CAPICO2 ROUND

Quickinfo

LUMINAIRE

ceiling
recessed
aluminium, white/black
IP54, IK06



LED


3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable
DALI dim
PHASE dim



Description

The versatile LED downlight CAPICO2 combines highest efficiency with modern aesthetics. Its elegant aluminum housing is complemented by a removable trim frame available in white or black. The high-gloss faceted reflector with a fine honeycomb structure ensures brilliant light distribution and excellent glare control. Efficient LED technology combined with optimized passive thermal management guarantees maximum output, longevity and sustainability. Ideal for reception areas, corridors, offices, conference rooms, retail spaces, and museums the CAPICO2 stands out as a stylish lighting solution for the most demanding applications. Tool-free installation with a spring-loaded clamp mechanism enables quick and easy mounting.

Now also available as **STRAIGHT LINE** with a square frame despite a round ceiling cut-out.



Types

PRODUCT CODE LUMINAIRE	CONTROL	PRODUCT CODE POWER GEAR	POWER	LUMINOUS FLUX	CURRENT	DIMENSION	CUT-OUT
DLC2S13.0XX2X.2	ON-OFF	VSG.ASI018.01	10 - 13W	1.380 - 1.780lm	max. 320mA	Ø110mm	Ø90-95mm
	DALI2 dim	VSG.ASI026.02	13W	1.780lm			
	PHASE dim	VSG.ASI015.05	8 - 13W	1.100 - 1.780lm			
DLC2M20.0XX2X.2	ON-OFF	VSG.ASI018.01	10 - 18W	1.440 - 2.600lm	max. 600mA	Ø172mm	Ø150-165mm
	DALI2 dim	VSG.ASI026.02	13 - 25W	1.900 - 3.600lm			
	PHASE dim	VSG.ASI015.05	8-15W	1.150-2.160lm			
DLC2L25.0XX2X.2	ON-OFF	VSG.ASI018.01	10 - 18W	1.440 - 2.600lm	max. 740mA	Ø228mm	Ø200-210mm
	DALI2 dim	VSG.ASI035.01	20 - 30W	2.880 - 4.320lm			
		VSG.ASI026.02	13 - 26W	1.900 - 3.600lm			
	PHASE dim	VSG.ASI015.05	8 - 15W	1.150-2.160lm			
		VSG.ASI025.05	15 - 25W	1.890 - 3.900lm			
		VSG.ASI035.05	20 - 30W	2.880 - 4.320lm			



2 Light distribution
1... MEDIUM 60°
2... SPOT 36°

3 Colour temp
3... 3000K
4... 4000K

Detailed performance settings can be found on pages 58/59.

EB Multilumen




One luminaire, different luminous intensities
Power levels can be easily adjusted using a DIP switch


What's new.

all detailed performance settings for the luminaire you can find on pages 58/59

Light distribution

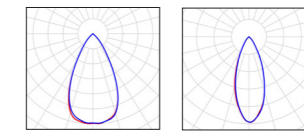


Dimensions

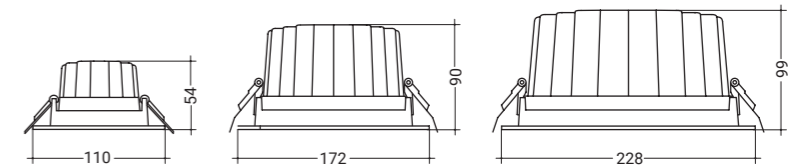

Reflector

Tool-free interchangeable reflector for customized design and adaptation



PRODUCT CODE	DESCRIPTION
DLC2SZB020.X	Reflector for housing size Ø110mm
DLC2MZB020.X	Reflector for housing size Ø172mm
DLC2LZB020.X	Reflector for housing size Ø228mm

X Colour
2... faceted high-gloss
3... black glossy

Square frame - STRAIGHT LINE

PRODUCT CODE	DESCRIPTION
DLC2MZB030.X	For CAPICO2 M Cut-Out: Ø150-165mm External dimension: 175x175mm
DLC2LZB030.X	For CAPICO2 L Cut-Out: Ø200-210mm External dimension: 230x230mm

X Housing colour
2... white
3... black

EVER THOUGHT AROUND THE CORNER?

STRAIGHT LINE

The square frame gives the round downlight a modern, geometric design that brings clean lines and timeless elegance to any interior – **stylish, innovative, and unique.**

