


01 High-bay luminaires HB3

Quickinfo

LUMINAIRE

ceiling, wall
suspended, surface mounted
aluminium, grey
IP65, IK09



LED

4000K
CRI>80
initial MacAdam 4 SDCM
100.000h L80

LIGHT DISTRIBUTION




ELECTRIC

ON-OFF switchable
DALI dim



Description

High-performance industrial luminaire with maximum efficiency and optimized light distribution. The innovative MLL optic (Multiple LED Lens) ensures precise light control and excellent glare reduction. The robust, rotationally symmetrical housing features a high-quality powder coating and stands out with superior functionality and durability. Its sleek, modern design incorporates optimized passive thermal management with intelligently guided airflow, minimizing dust accumulation and significantly extending service life. The luminaire also offers high installation flexibility and a maintenance-friendly design.

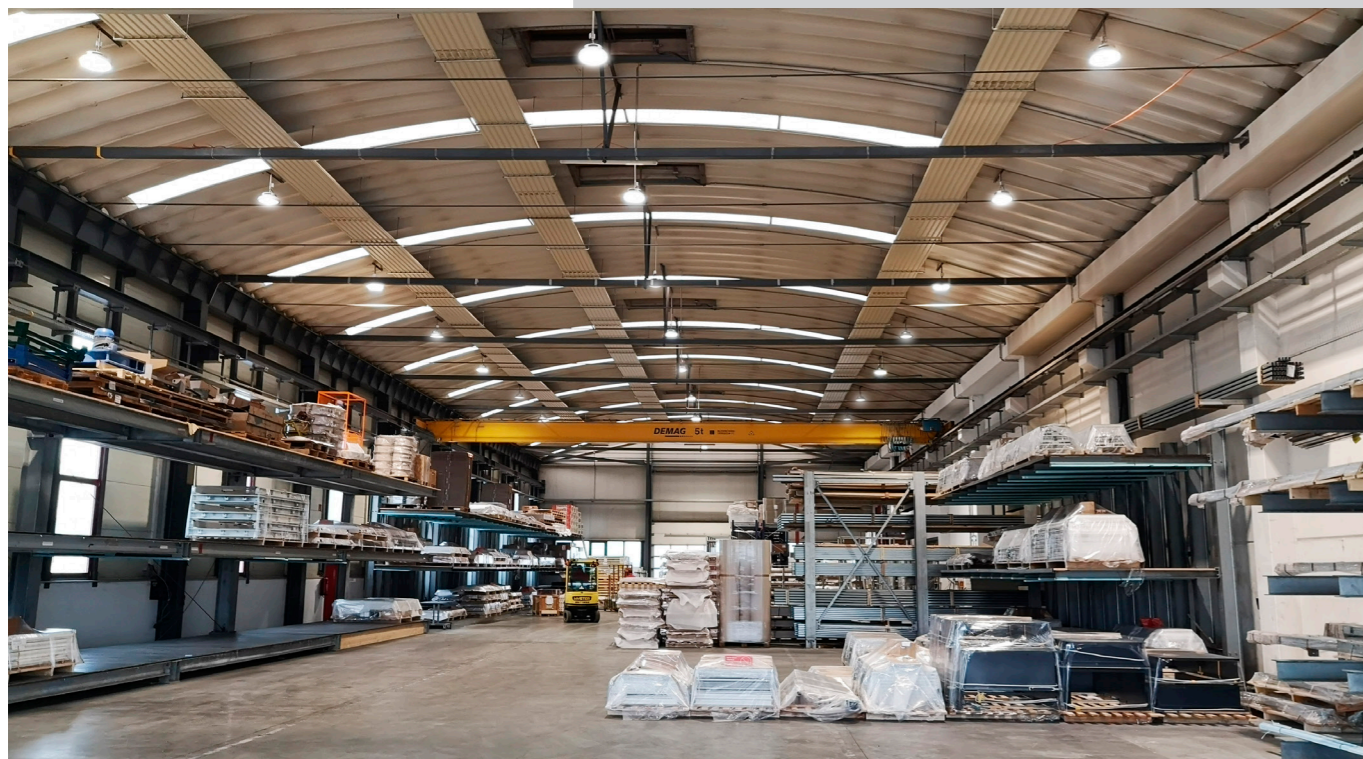


Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
HLH3120.2X424	120W	20.100lm	4000K	5,5kg
HLH3200.2X424	200W	32.400lm		

- 1 X
- 2 Light distribution
- 2... SPOT 65°
- 3... MEDIUM 85°


Light distribution




SPOT 65°
UGR<25

MEDIUM 85°
120W: UGR<22
200W: UGR<25

Dimensions



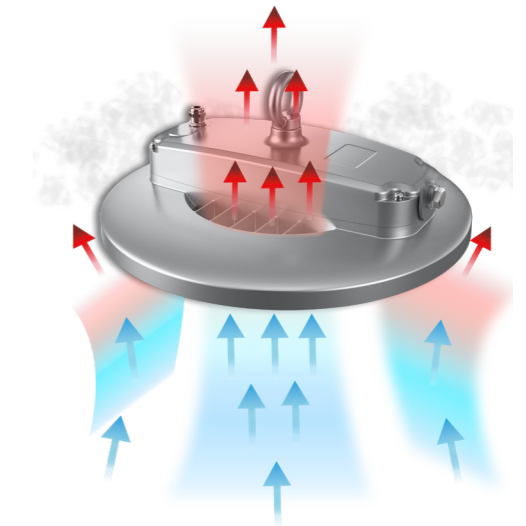

Innovative MLL optics for precise light control



Optimised, passive thermal management

Accessories

	PRODUCT CODE	DESCRIPTION
	HLH3ZB010	Mounting bracket, swivelling
	HLMKZB020	2m chain for pendant mounting, incl. carabiner

