


04 Luminaires with higher degree of protection

POLEDO SLIM3

Quickinfo

LUMINAIRE

ceiling, wall
suspended, surface mounted
polycarbonate, white
IP65, IK08



LED


3000K, 4000K
CRI>80
initial MacAdam 4 SDCM
50.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable



Description


Our POLEDO SLIM3 luminaire combines a modern, slim housing with versatile application potential. Its one-piece, impact-resistant polycarbonate enclosure ensures high durability and a long service life. The opal diffuser delivers wide, uniform light distribution, making it especially suitable for areas with low ceiling heights, such as underground car parks or storage facilities. The integrated MULTILUMEN function enables flexible adjustment of light output across multiple power levels. EASY CONNECT interfaces on both ends and built-in through-wiring (3x1.5 mm²) facilitate fast and efficient installation.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	LENGTH	COLOUR TEMP.	WEIGHT
FRPSF20.1AX22.5	20W	3.000lm	629mm	3000K 4000K	0,6kg
FRPS040.1AX22.5	20 - 40W	2.900 - 5.800lm	1175mm		1,5kg
FRPS060.1AX22.5	30 - 60W	4.500 - 8.900lm	1450mm		1,6kg

--- X ---
3 3 Colour temp.
3 3000K
4 4000K



Easy Connect

For easy connection

EB Multilumen



One luminaire, different luminous intensities

Power levels can be easily adjusted using a DIP switch.


FRPS040.1AX22.5:

20W/25W/30W/40W selectable

FRPS060.1AX22.5:

30W/40W/50W/60W selectable

Dimensions

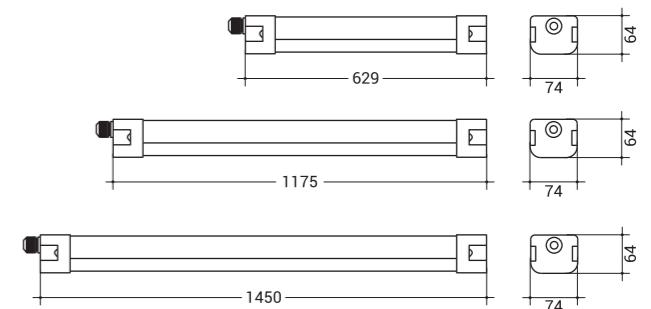

Through-wiring



Incl. 3x1,5mm² through-wiring



Accessories

PRODUCT CODE	DESCRIPTION
FRMSZB030	Mounting bracket swivelling, Set of 2pcs
FRPSZB040	Cable suspension kit 1,5m, Set of 2pcs