

BEAM2

Quickinfo

LUMINAIRE

floor, wall
surface mounted
aluminium, black RAL9005
IP65, IK06

LED

3000K
CRI>80
initial MacAdam 5 SDCM
50.000h L80

OPTIC

symmetric 24°/50°

ELECTRIC

ON-OFF switchable



Description

Discreet architectural spotlight developed for the illumination of buildings, sculptures, facades and gardens. Impressive lighting effects are created by a targeted beam pattern. Optionally available with flange plate or ground spike. High-quality housing made of black powder-coated die-cast aluminium. Use of efficient LED technology with innovative reflector unit. Extremely weatherproof and durable. LED control gear integrated in luminaire housing.




Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	EXECUTION
ASB2S08.1X323.M	8W	900lm	3000K	flange plate
ASB2S08.1X323.E				ground spike



incl. 45cm
rubber cable

Optic

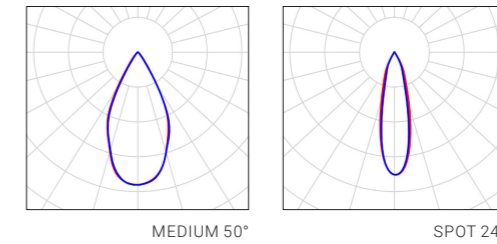

Dimension

