

MID2

Quickinfo

LUMINAIRE

street, path, parking space for spigot Ø60mm or Ø76mm with optional adaptor aluminium, grey RAL9007 IP66, IK09

LED


2200K, 2700K, 3000K, 4000K CRI>70, CRI>80 optional initial MacAdam 4 SDCM 100.000h L80

OPTIC

asymmetric street01 asymmetric wide01 streetwalk left, right

ELECTRIC

ON-OFF switchable DALI dim automatic DIM profile



Description

Contemporary street luminaire with a straightforward modern design language. Versatile solution for professional lighting of all types of traffic routes. Housing made of grey powder-coated die-cast aluminium. Highly efficient LED technology with innovative lens system for optimal light intensity distribution. Cover made of transparent tempered glass. Extremely weather-resistant and durable. Quick and easy mounting with stainless steel clamping screws. Additional adapters for wall and pole mounting available on request.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	MOUNTING HIGH	WEIGHT
STM2020.XXX14	19W	2.600lm	2200K 2700K 3000K 4000K	4-6m	5,3kg
STM2040.XXX14	39W	5.100lm			
STM2060.XXX14	65W	8.400lm			
STM2080.XXX14	74W	10.300lm			
STM2100.XXX14	101W	13.800lm	3000K / 4000K	4-8m	7,2kg
STM2120.XXX14	112W	14.600lm			
STM2140.XXX14	140W	18.200lm		8-10m	



1 Control
1... ON-OFF switchable
2... DALI dim
6... Automatic DIM profile

2 Optic
2... STREET01
3... WIDE01
L... STREETWALK left
R... STREETWALK right

3 Colour Temp.
1... 2200K
2... 2700K
3... 3000K
4... 4000K



Installation and maintenance

Tool-free opening of the luminaire, simplifies installation and maintenance

Automatic DIM profile





A customised, autonomous dimming profile with time intervals and light levels is programmed into the LED control gear. No additional wiring is required on the luminaire.

Full cut-off luminaire




Luminaires that are shielded upwards and do not emit light in and above the horizontal.

Optic

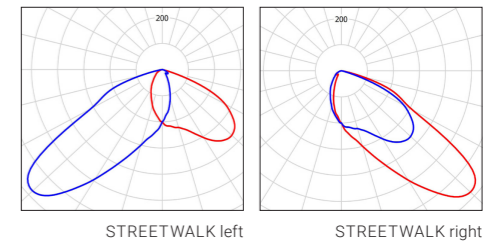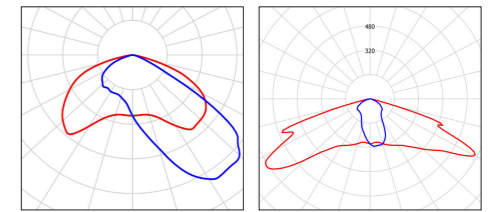

Dimension

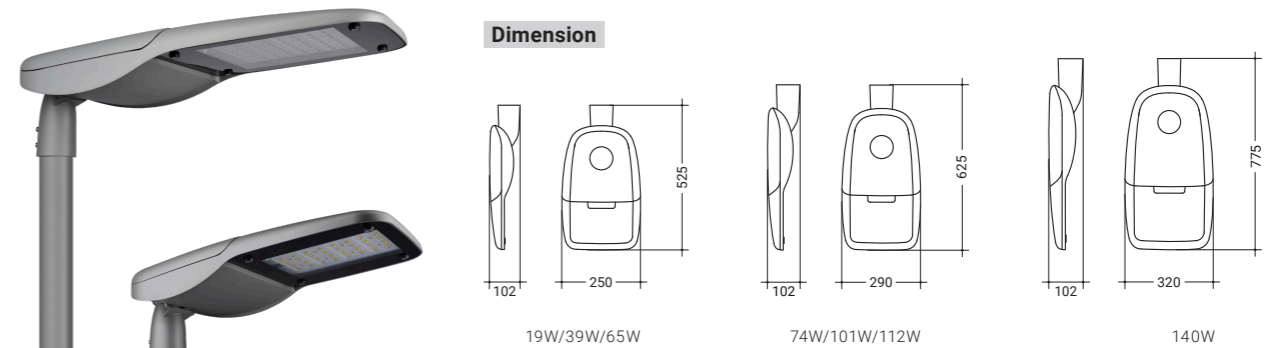

Masts and accessories



All steel and aluminium masts incl. accessories are also available from UEBEX.

