


09 Wall and ceiling luminaires

TILIA CIRCLE & LINEAR

Quickinfo

LUMINAIRE

ceiling, wall
surface mounted
Polycarbonat, white
IP54, IK08



LED


3000K, 4000K
CRI>80
initial MacAdam 4 SDCM
50.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable

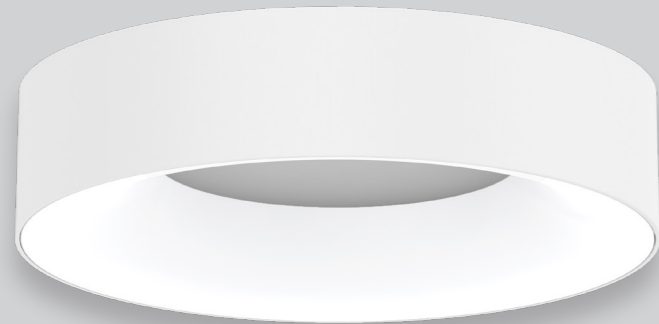

Description

The ring-shaped luminaire body of the TILIA CIRCLE is made of durable, impact-resistant white polycarbonate. Its modern design delivers wide-beam, uniform illumination. Suitable for both wall and ceiling mounting and rated IP54, it is ideal for areas with increased protection requirements. In addition to high efficiency, long lifespan, and versatile applications, the luminaire impresses with its easy installation – making it a reliable choice for demanding environments.

Quickinfo

LUMINAIRE

ceiling, wall
surface mounted
Polycarbonat, white
IP40, IK08



LED


3000K, 4000K, 5700K
CRI>80
initial MacAdam 3 SDCM
50.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable

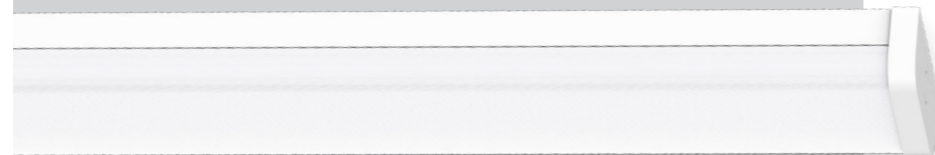

Description

Clean lines, timeless design. The TILIA LINEAR combines minimalist aesthetics with exceptional functionality. Its slim, linear luminaire body, crafted from impact-resistant white polycarbonate, seamlessly integrates into any environment. Whether mounted on walls or ceilings, this luminaire impresses with outstanding efficiency, remarkable durability, and versatile application options. The selectable colour temperature allows the light to be perfectly tailored to any setting – from warm white to cool white. A smooth surface ensures easy cleaning, while the thoughtfully engineered design guarantees quick and hassle-free installation.

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	WEIGHT
ALTC030.1AC22	18-30W	1.700 - 2.800lm	3000K / 4000K selectable	Ø400x71mm	1,5kg

EB Multilumen




One luminaire, different luminous intensities

Power levels can be easily adjusted using a DIP switch


ALTC030.1AC22:
18W/25W/30W selectable

Light distribution



OPAL

Dimensions



Multicolour




One luminaire, different colour temperatures

Selectable colour temperatures:
3000K/4000K

Optic



Smooth opal structure
for soft illumination

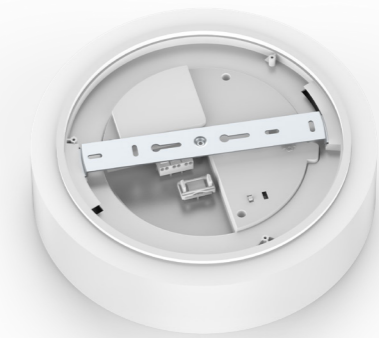

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	WEIGHT
ALTL038.1AC22	38W	3.900lm	3000K / 4000K / 5700K selectable	1200x124mm	2,1kg


Multicolour



One luminaire, different colour temperatures


Selectable colour temperatures:
3000K/4000K/5700K

Light distribution



OPAL

Dimensions



Optic



Smooth opal structure
for soft illumination

Connection

Cable entry possible at both ends and through the back of the luminaire

