High-bay luminaires **GYM2**

Quickinfo LUMINAIRE

ceiling suspended, surface mounted, recessed steel, white IP40, IK10





LED

3000K, 4000K initial MacAdam 3 SDCM 75.000h L80

LIGHT DISTRIBUTION

deep-wide

ELECTRIC

ON-OFF switchable DALI dim

















Description

LED high-bay luminaire with ball-proof cover specially developed for use in sports facilities, schools and gymnasiums. Robust housing made of white powder-coated sheet steel. Simple design with optimised passive thermal management. Highly efficient LED technology with innovative reflector unit for optimum light distribution. Suitable for surface or pendant mounting as standard. Recessed mounting on request.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	DIMENSIONS	COLOUR TEMP.	WEIGHT
HLG2060.XEX22.E	60W	7.100lm	1200x300mm 3000K		5,5kg
HLG2100.XEX22.E	100W	11.400lm		3000K	
HLG2120.XEX22.E	120W	14.200lm	4000K 1500x300mm	4000K	7.51
HLG2150.XEX22.E	150W	15.800lm		7,5kg	





1	Control			
1 ON-OFF switchable				
2 DALI dim				



Configurable as recessed luminaire


Light distribution





Accessories

 PRODUCT CODE	DESCRIPTION
HLG2ZB020	Y-Rope System, Set of 2pcs

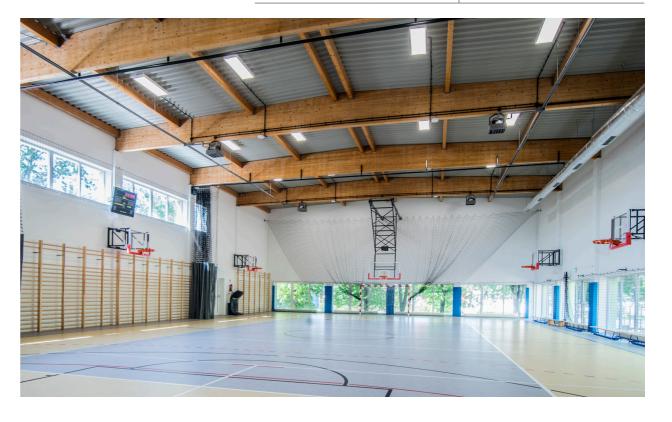

21 20