

07 Recessed luminaires PLANELO2

Quickinfo

LUMINAIRE

ceiling
recessed, surface mounted, suspended
aluminium, white
IP20



LED



3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
100.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable
DALI dim
1-10V dim
PHASE dim



description

The ultra-thin LED panel PLANELO2 features a multi-layer light field and minimalist design crafted from high-quality aluminum with a continuous frame. Specifically designed for recessed installation in M600 and M625 modular ceilings, it meets all requirements for modern, glare-free workplace lighting according to DIN EN 12464-1 (UGR <19).


The micro-prismatic diffuser with intelligent light extraction and highly reflective coating ensures uniform, homogeneous light distribution. Versatile accessories provide additional flexible mounting options.



What's new::

Maximum efficiency for noticeable cost reductions!

Our latest generation sets new standards: achieve the same high lumen values with significantly reduced energy consumption. Same light output, lower costs – that's efficiency at its best.

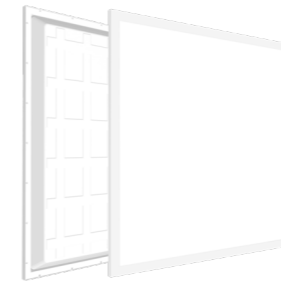

Optic

Microprism texture for decreased luminous intensity

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	WEIGHT
LFP2Q30.XBX22	30W	4.660lm	3000K 4000K	620x620mm	2,4kg
LFP2R30.XBX22	30W	4.660lm		1245x310mm	2,4kg




1 Control
1... ON-OFF switchable
2... DALI dim
3... 1-10V dim
5... PHASE dim

3 Colour temp.
3... 3000K
4... 4000K

Custom sizes available on request



Looking for the well-known PLANELO 295x295mm?
See page 88!w

Light distribution



MICROPRISM
UGR19

Dimensions

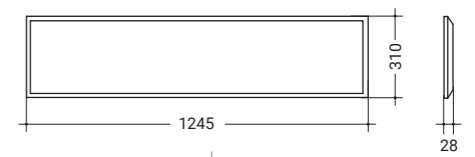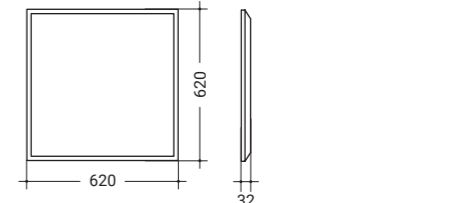

The measure of all things. Now fits perfectly in M625 ceilings. Without installation accessories.

Accessories

	PRODUCT CODE	DESCRIPTION
	LFP2QZB010	Surface mounting frame 625x625x70mm, white
	LFP2QZB020	Y-cable suspension kit 1,5m, Set of 2pcs
	LFP2QZB030	Mounting clamps, Set of 4pcs

SURFACE-MOUNTED VERSION

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	GEWICHT
LFPR036.XBX22.P	36W	4.300lm	3000K / 4000K	2,0kg




1 Control
1... ON-OFF switchable
2... DALI dim
3... 1-10V dim
5... PHASE dim

3 Colour temp.
3... 3000K
4... 4000K

Accessories

	PRODUCT CODE	DESCRIPTION
	LFPRZB010	Surface mounting frame 1200x300x45mm, weiß
	LFPRZB020	Y-cable suspension kit 1,5m, Set of 2pcs
	LFPRZB031	Mounting clamps, Set of 4pcs

Light distribution



MICROPRISM
UGR19

Dimensions

