

POLE PRIME



Quickinfo

LUMINAIRE

floor
surface mounted
aluminium, black
IP65, IK10

LED

3000K
CRI>80
initial MacAdam 4 SDCM
80.000h L80

LIGHT DISTRIBUTION




ELECTRIC

ON-OFF switchable



Description

The POLE PRIME bollard light combines elegant design with sophisticated functionality. With its harmonious light pattern and precise beam angle, it creates an atmospheric setting for paths, parks and gardens. The robust, corrosion-protected housing made of powder-coated aluminium withstands wind and weather and ensures long-lasting aesthetics. Modern LED technology with downward light control (ULOR=0) enables sustainable lighting without light pollution. An optionally available cover plate can limit the lateral beam angle on one side. Thanks to the integrated flange, installation is quick and easy.

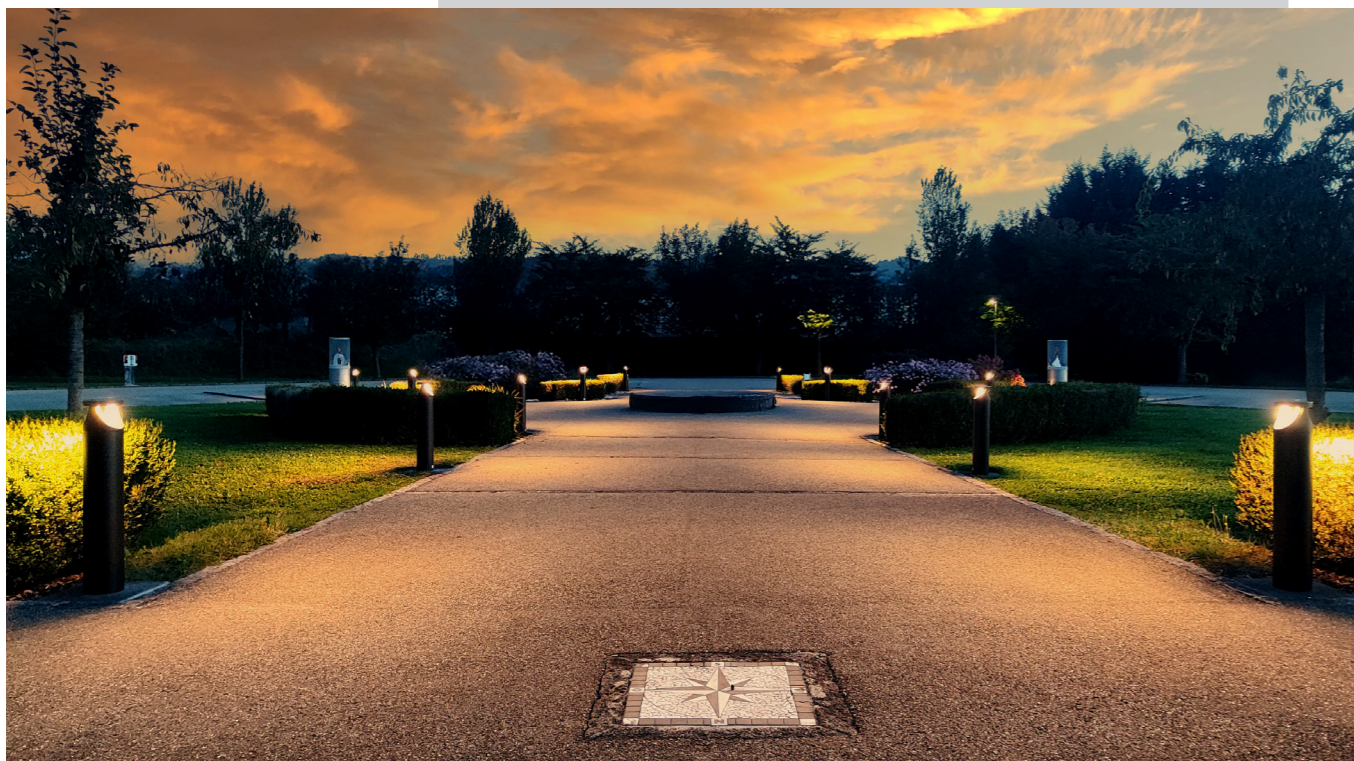

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	WEIGHT
WBPP024.11323	7 - 24W	570 - 1.900lm	3000K	Ø165 x 900mm	6,1kg

EB Multilumen



One luminaire, different luminous intensities


Power levels can be easily adjusted using a DIP switch
7W/12W/18W/24W selectable

Full cut-off system



Luminaires that are shielded upwards and do not emit light in and above the horizontal.

Light distribution




SYMMETRIC
150°x104°



Simple structure and installation

Easy installation thanks to mounting plate with concrete anchors. Quick and easy mechanical and electrical connection.

Dimension

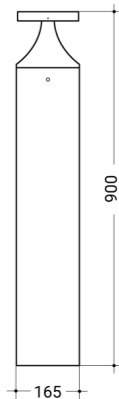

Corrosion category 3 (ØNORM EN ISO 9223)

Corrosion-protected for use in urban, industrial and coastal areas with moderate exposure..



Accessories

	PRODUCT CODE	DESCRIPTION
	WBPPZB010	Cover plate for one-sided light emission