

11 Spotlights and track systems

WAVE3

Quickinfo

LUMINAIRE

ceiling, wall
installation in 3-phase-track
aluminum, white/black
IP20



LED


3000K, 4000K
CRI>90
initial MacAdam 3 SDCM
50.000h L80

LIGHT DISTRIBUTION



ELECTRIC

PHASE dim
DALI dim



Description

The WAVE3 track spotlight, made from die-cast aluminum, impresses with its minimalist design and clean lines, available in three sizes. Its spotlight head swivels 350° and tilts 90° offering maximum flexibility for precise lighting effects. The tool-free interchangeable reflector unit allows for further fine-tuning of the beam characteristics. Featuring a high-gloss, faceted reflector and a high color rendering index (CRI > 90), it delivers brilliant object illumination. The individually selectable color temperature on the spotlight enables tailored lighting design, providing unmatched adaptability for any application.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
SLW3S10.XXC3X	10W	1.050lm	3000K 4000K selectable	0,4kg
SLW3M20.XXC3X	20W	2.200lm		0,7kg
SLW3L30.XXC3X	30W	3.100lm		0,8kg




- 1 Control
- 2... DALI dim,
- 5... PHASE dim
- 2 Light distribution
- 1... WIDE 60°
- 2... MEDIUM 38°
- 3... SPOT 24°
- 5 Housing colour
- 2... white
- 3... black


1 data of power and dimensions differ




Light distribution

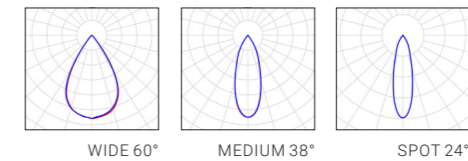

Dimensions

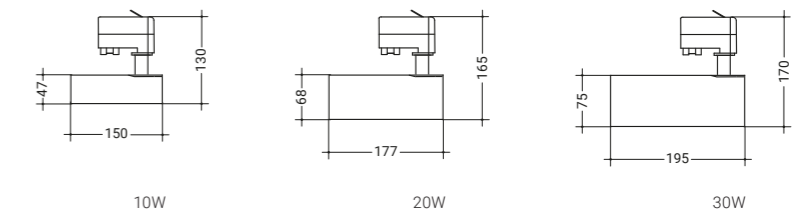

Multicolour



One luminaire, different colour temperatures

Selectable colour temperatures:
3000K/4000K

