

15 Architektonische Strahler


BEAM



LUMINAIRE
architectural light aluminium powder-coated grey IP65, IK08
LED
3000K CRI>80 4-Step MacAdam ON-OFF
LED LIFETIME (est.)
50.000h L80
OPTICS
spot

DE Architektonischer Strahler entwickelt für die Beleuchtung von Bauwerken, Skulpturen, Fassaden und Gartenanlagen. Durch eine enge Abstrahlcharakteristik werden beeindruckende Lichteffekte erzeugt. Der inkludierte schwenkbare Montagehalter bietet flexible Einstellungen der Leuchte. Hochwertig gefertigtes Gehäuse aus grauem pulverbeschichtetem Aluminiumdruckguss. Hocheffiziente LED-Technik mit innovativem PMMA-Linsensystem für eine optimale Lichtstärkeverteilung. Durch die Pulverbeschichtung witterungsbeständig und langlebig.

EN Architectural spotlight designed for the illumination of buildings, sculptures, facades and gardens. Impressive lighting effects are created by a narrow beam characteristic. The included swivelling mounting bracket offers flexible adjustment of the luminaire. High-quality manufactured housing made of grey powder-coated die-cast aluminium. Highly efficient LED technology with innovative PMMA lens system for optimum luminous intensity distribution. Weather-resistant and durable due to powder coating.

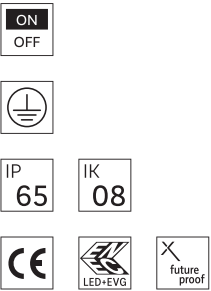

Architectural spotlights 15

BEAM


BEAM-S

ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	LEDs	COLOUR TEMP.
ASBE015.11324	15W	1500lm	5	3000K

BEAM-M


ORDER CODE	SYSTEM POWER	LUMINOUS FLUX	LEDs	COLOUR TEMP.
ASBE027.11324	27W	2300lm	9	3000K

Lichtkurven | Lightcurves



spot

Technische Skizzen | Technical sketches

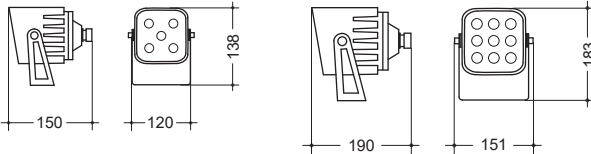

BEAM-S



BEAM-M

also available with earth spike
ORDER CODE: ASBEZB010