

# PLANELO PREMIUM

### Quickinfo

#### LUMINAIRE

ceiling  
recessed, surface mounted, suspended  
aluminium, white/black  
IP20



#### LED


3000K, 4000K  
CRI>80  
initial MacAdam 3 SDCM  
50.000h L80

#### OPTIC

microprism. wide UGR19

#### ELECTRIC

ON-OFF switchable  
DALI dim  
1-10V dim  
PHASE dim



### Description

Ultra-flat, multi-layered light field with minimalist aluminium design and surrounding trim. Designed for installation in modular ceilings M600 or M625, PLANELO PREMIUM combines all the properties for modern, glare-free task lighting according to DIN EN 12464-1 (UGR<19). The microprismatic diffuser with intelligent light extraction and highly reflective coating provides absolutely homogeneous light distribution. The versatile accessories offer additional mounting options.

### Types

PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	WEIGHT
LFPQ018.XBX2X.P	18W	1.900lm	3000K 4000K	295x295mm	1,0kg
LFPQ036.XBX2X.P	36W	4.500lm		620x620mm	2,0kg
LFPR036.XBX22.P	36W	4.200lm		1195x295mm	




**1 Control**  
1... ON-OFF switchable  
2... DALI dim  
3... 1-10V dim  
5... PHASE dim


**3 Colour Temp.**  
3... 3000K  
4... 4000K

**5 Housing colour**  
2... white  
3... black

Special dimensions  
on request

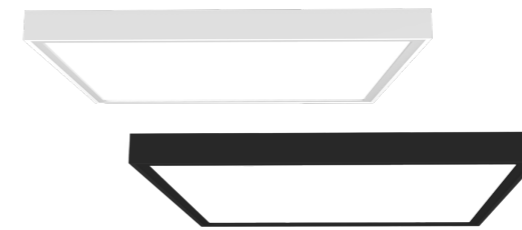

### Optic




UGR19 MICROPRISMATIC

### Optic



Microprism structure  
for reduced luminance

### Dimension

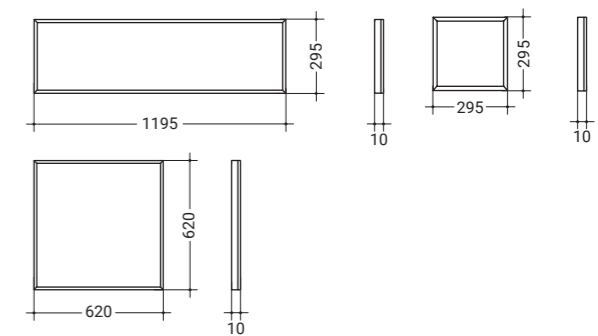

### Accessories

	PRODUCT CODE	DESCRIPTION
	LFPQZB010	Surface mounting frame 625x625x45mm, white
	LFPQZB011	Surface mounting frame 300x300x45mm, white
	LFPQZB010.3	Surface mounting frame 625x625x45mm, black
	LFPQZB011.3	Surface mounting frame 300x300x45mm, black
	LFPRZB010	Surface mounting frame 1200x300x45mm, white
	LFPQZB020	Y-rope system, Set of 2pcs, 1500mm
	LFPQZB031	Mounting clamps, Set of 4pcs
	LFPRZB030.S	Extension frame for Module ceiling M625, 1245x308mm, white

