


09 Wall and ceiling luminaires

PLANELO ROUND

Quickinfo

LUMINAIRE

ceiling, wall
surface mounted
aluminium, white
IP40, IK03



LED

3000K, 3500K, 4000K
CRI>80
initial MacAdam 4 SDCM
50.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable



-230 V
50-60Hz




IP
40



Description


PLANELO ROUND represents the perfect fusion of timeless elegance and advanced lighting technology. This premium aluminum luminaire in classic white sets new standards in workplace illumination, delivering modern, glare-free lighting in compliance with DIN EN 12464-1 (UGR <19). Available in two housing sizes and featuring selectable colour temperatures of 3000K, 3500K and 4000K, PLANELO ROUND offers maximum flexibility for a wide range of applications. Its refined design and high-quality craftsmanship make it the ideal choice for contemporary offices, lounges, and conference rooms.

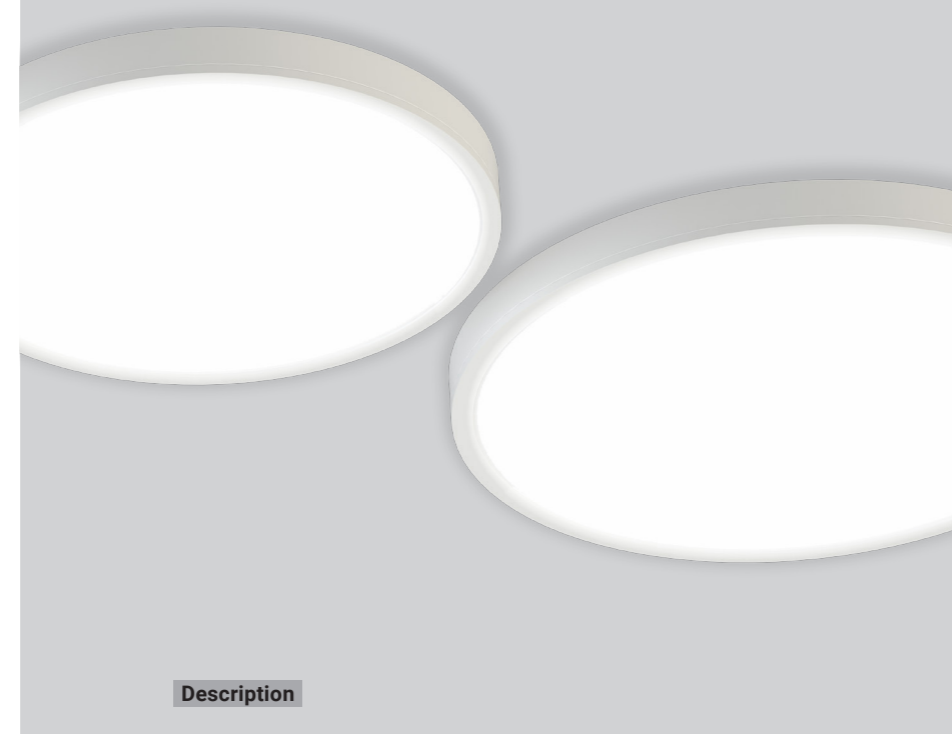

Types


PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	DIMENSION	WEIGHT
ALPR020.1BC22	10-20W	1.100lm - 2.500lm	3000K/3500K/4000K selectable	Ø380mm	1,2kg
ALPR032.1BC22	26-32W	3.000lm - 4.000lm		Ø580mm	2,3kg

Light distribution



MICROPRISM.
UGR19-21

Dimensions

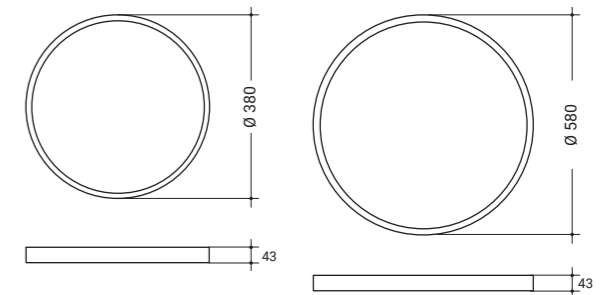

Optic




Microprism texture for decreased luminous intensity

Mounting system



Innovative fastening mechanism for simple and fast assembly

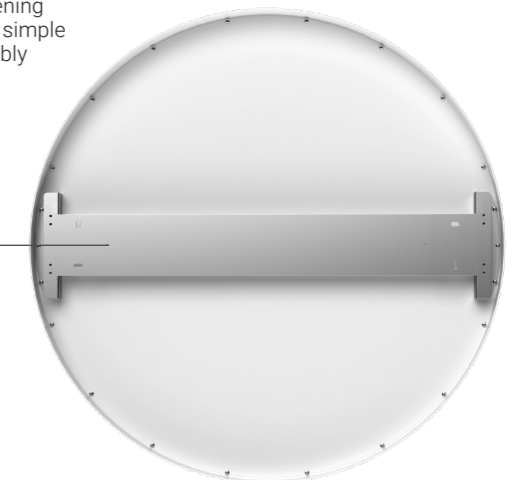

Multicolour



One luminaire, different colour temperatures

Selectable colour temperatures: 3000K/3500K/4000K

EB Multilumen



One luminaire, different luminous intensities

Power levels can be easily adjusted using a DIP switch

ALPR020.1BC22:
10W/14W/17W/20W selectable
ALPR032.1BC22:
26W/28W/30W/32W selectable

