

01 High-bay luminaires

GYM2

Quickinfo

LUMINAIRE

ceiling
suspended, surface mounted, recessed
steel, white
IP40, IK10



LED


3000K, 4000K
CRI>80
initial MacAdam 3 SDCM
100.000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON-OFF switchable
DALI dim



Description

The GYM2 was specially developed for use in sports facilities, schools, and gymnasiums, and features an impact-resistant cover. Its robust housing, made of white powder-coated steel sheet, ensures maximum stability and durability. The clean design, combined with optimized passive thermal management, delivers reliable performance even under demanding conditions. High-efficiency LED technology and an innovative reflector unit provide excellent light distribution and optimal visibility. The GYM2 is suitable for surface or pendant mounting as standard; a recessed version is available on request.



Types

PRODUCT CODE	POWER	LUMINOUS FLUX	DIMENSION	COLOUR TEMP.	WEIGHT
HLG2060.XEX22.E2	60W	9.400lm	1200x300mm	3000K 4000K	5,5kg
HLG2100.XEX22.E2	100W	14.500lm			7,5kg
HLG2115.XEX22.E2	115W	17.400lm	1500x300mm	3000K 4000K	7,5kg
HLG2150.XEX22.E2	150W	21.500lm			




1 Control
1... ON-OFF switchable
2... DALI dim

3 Colour temp.
3... 3000K
4... 4000K


Configurable as recessed version

Light distribution



REFLECTOR
55°x96°

Dimensions

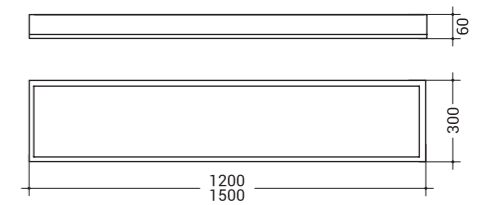

Accessories

	PRODUCT CODE	DESCRIPTION
	HLG2ZB020	Y-Wire Suspension Set, Set of 2pcs

